


A

B

C

D

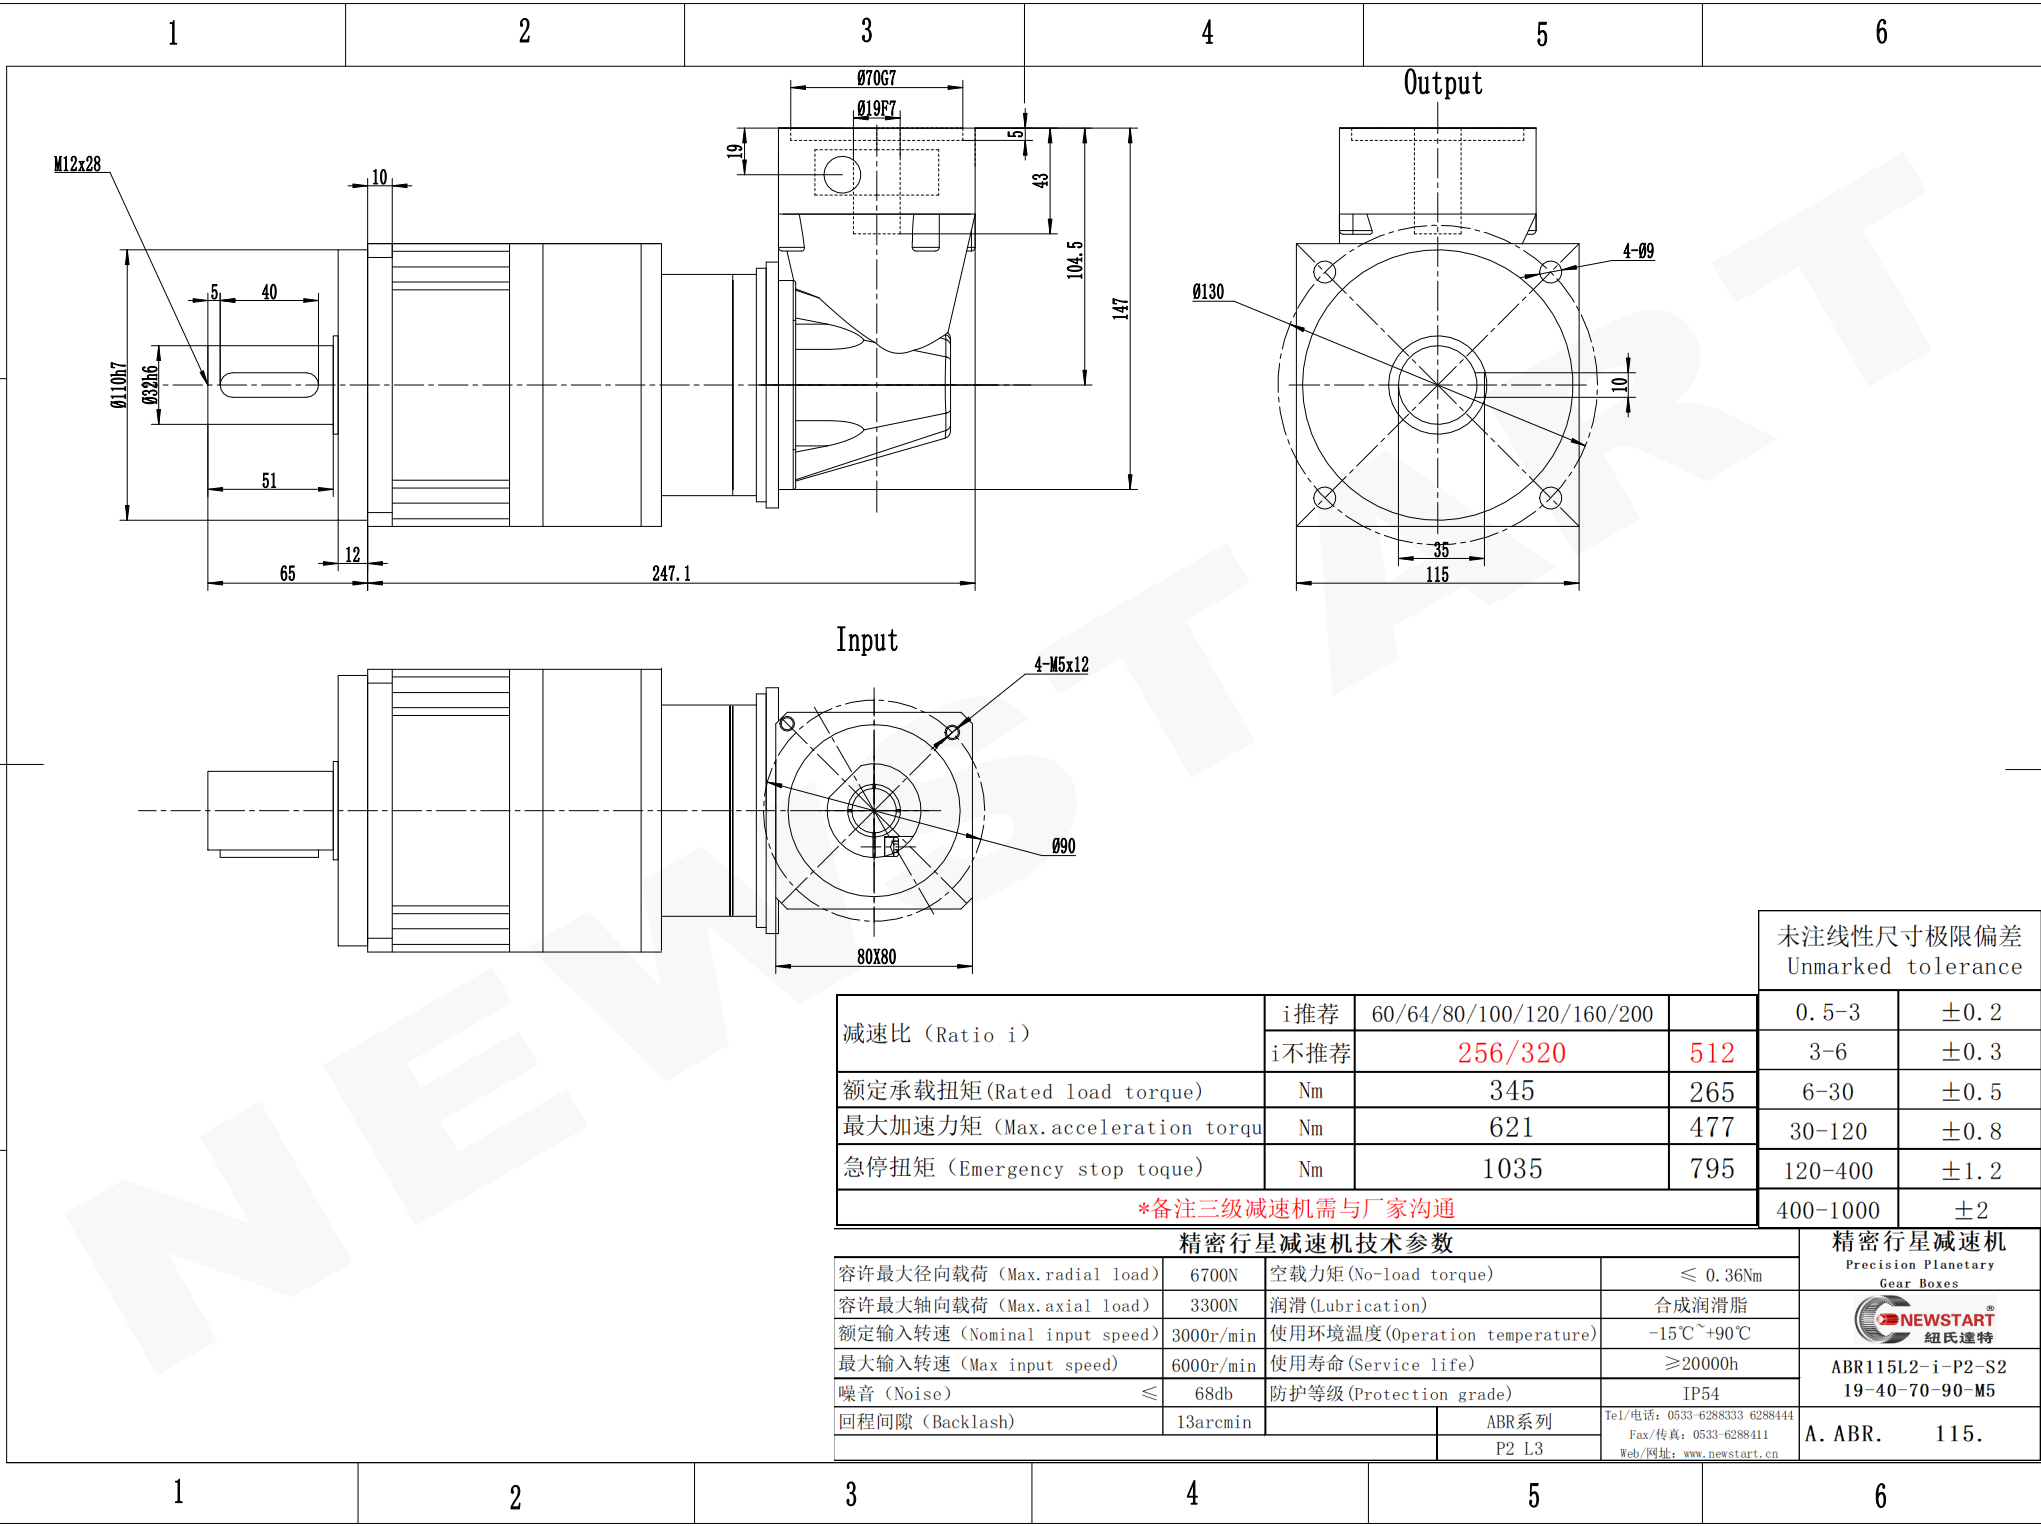

A


B

C

D

未注线性尺寸极限偏差
Unmarked tolerance

减速比 (Ratio i)	i 推荐	60/64/80/100/120/160/200		0.5-3	±0.2
	i 不推荐	256/320	512	3-6	±0.3
额定承载扭矩 (Rated load torque)	Nm	345	265	6-30	±0.5
最大加速力矩 (Max. acceleration torque)	Nm	621	477	30-120	±0.8
急停扭矩 (Emergency stop torque)	Nm	1035	795	120-400	±1.2
*备注三级减速机需与厂家沟通				400-1000	±2

精密行星减速机技术参数				精密行星减速机	
容许最大径向载荷 (Max. radial load)	6700N	空载力矩 (No-load torque)	≤ 0.36Nm		<div>Precision Planetary Gear Boxes</div> <div></div> <div>紐氏達特</div>
容许最大轴向载荷 (Max. axial load)	3300N	润滑 (Lubrication)	合成润滑油		
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	≥20000h		
噪音 (Noise)	≤ 68db	防护等级 (Protection grade)	IP54		ABR115L2-i-P2-S2 19-40-70-90-M5
回程间隙 (Backlash)	13arcmin	ABR系列	Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn		
		P2 L3	A. ABR. 115.		