

A

B

C

D

A

B

C

D

1

2

3


4

5

6

输入端 Input

输出端 Output

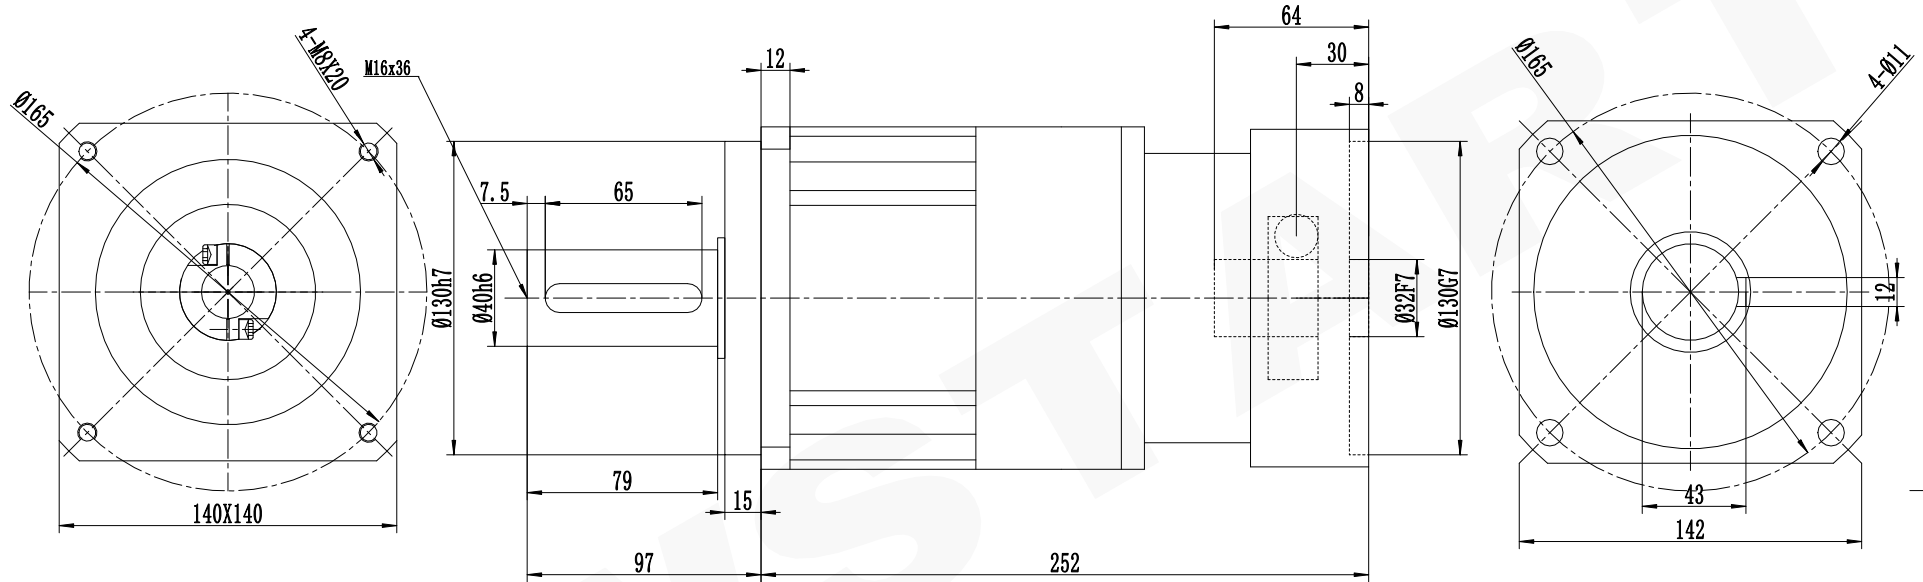

减速比 (Ratio i)	i 推荐	60/64/80/100/120/160/200		未注线性尺寸极限偏差 Unmarked tolerance	
	i 不推荐	256/320	512	0.5-3	±0.2
额定承载扭矩 (Rated load torque)	Nm	700	510	3-6	±0.3
最大加速力矩 (Max. acceleration torque)	Nm	1260	918	6-30	±0.5
急停扭矩 (Emergency stop torque)	Nm	2100	1530	30-120	±0.8
				120-400	±1.2
*备注三级减速机需与厂家沟通				400-1000	±2
精密行星减速机技术参数				精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max. radial load)	9600N	空载力矩20℃ (No-load torque)	≤ 0.72Nm	 纽氏达特	
容许最大轴向载荷 (Max. axial load)	4800N	润滑 (Lubrication)	合成润滑脂 (Synthetic grease)		
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃	AB142L3-i-P2-S2 32-58-130-165-M8	
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)	≥20000h		
噪音 (Noise)	≤ 65db	防护等级 (Protection grade)	IP54	A. AB. 142.	
回程间隙 (Backlash)	9arcmin	AB 系列	Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn		
		P2 L3			

1

2

3

4

5

6