

A

B

C

D

1

2



3

4


5

6

输入端 Input

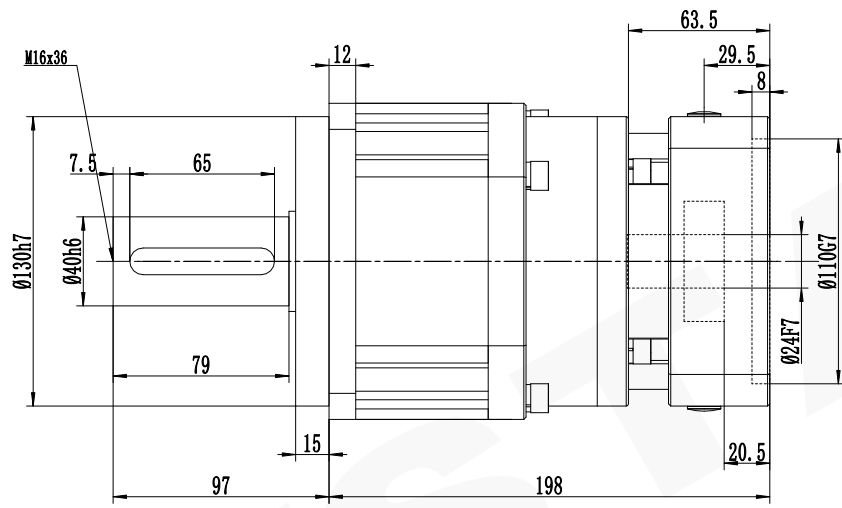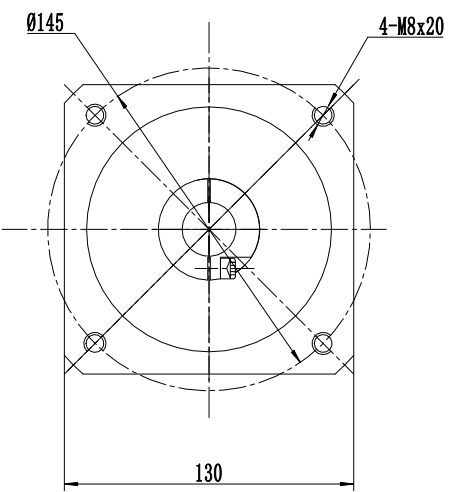

输出端 Output

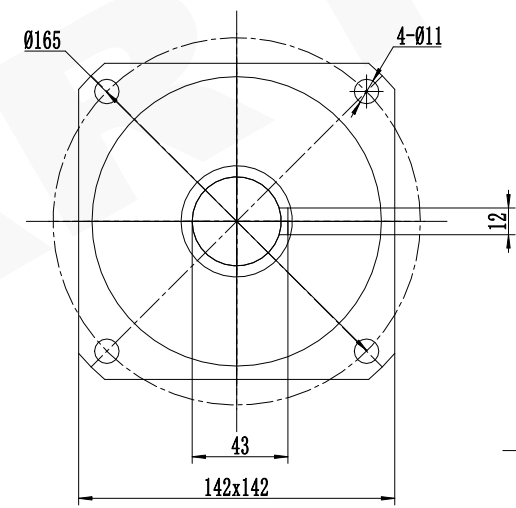

A

B

C

D

								未注线性尺寸极限偏差 Unmarked tolerance	
								0.5-3	±0.2
减速比 (Ratio i)	i 推荐	12/16/20/28	15/25/35/40		70			3-6	±0.3
	i 不推荐		30/45/50	60		64/80	90	6-30	±0.5
额定承载扭矩(Rated load torque)	Nm	700	650	610	540	510	455	30-120	±0.8
最大加速力矩 (Max.acceleration torque)	Nm	1260	1170	1098	972	918	819	120-400	±1.2
急停扭矩 (Emergency stop toque)	Nm	2100	1950	1830	1620	1530	1365	400-1000	±2
精密行星减速机技术参数								精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max.radial load)	9600N	空载力矩20℃ (No-load torque)			≤ 0.36Nm				
容许最大轴向载荷 (Max.axial load)	4800N	润滑 (Lubrication)			合成润滑油 (Synthetic grease)				
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)			-15℃~+90℃				
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)			≥20000h				
噪音 (Noise)	≤ 65db	防护等级 (Protection grade)			IP54			AB142L2-i-P2-S2 24-58-110-145-M8	
回程间隙 (Backlash)	7arcmin	AB系列			Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn			A. AB. 142.	
P2 L2									

1

2

3

4

5

6