

A

B

C

D

A

B

C

D

1

2

3


4

5

6

输入端 Input

输出端 Output

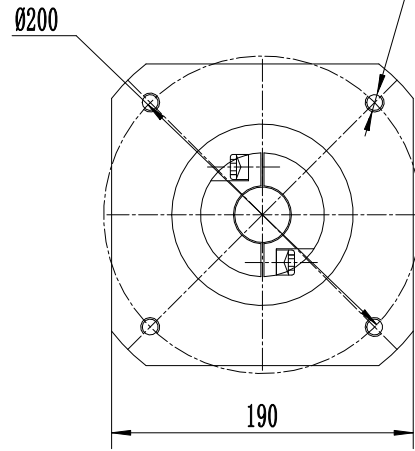

4-M12x25

M20x42

Ø160h7

Ø55h6

82

105

15

20

70

230

121

58.5

10

Ø114.3G7

Ø42F7

41


Ø215

4-Ø13

59

190

Ø16

减速比 (Ratio i)	i	3	4	5	6	7	8	9	10	6-30	±0.5	
额定承载扭矩(Rated load torque)	Nm	1186	1568	1431	1376	1151	1000	910	910	30-120	±0.8	
最大加速力矩 (Max.acceleration torque)	Nm	2134.8	2822	2576	2477	2072	1800	1638	1638	120-400	±1.2	
急停扭矩 (Emergency stop torque)	Nm	3558	4704	4293	4128	3453	3000	2730	2730	400-1000	±2	
精密行星减速机技术参数										精密行星减速机		
容许最大径向载荷 (Max.radial load)	14000N	空载力矩20℃ (No-load torque)					≤ 0.72Nm			Precision Planetary Gear Boxes		
容许最大轴向载荷 (Max.axial load)	7000N	润滑 (Lubrication)					合成润滑脂 (Synthetic grease)			 纽氏达特		
额定输入转速 (Nominal input speed)	1500r/min	使用环境温度 (Operation temperature)					-15℃~+90℃			AB180L1-i-P2-S2		
最大输入转速 (Max input speed)	3000r/min	使用寿命 (Service life)					≥20000h					
噪音 (Noise)	≤ 67db	防护等级 (Protection grade)					IP54			42-113-114.3-200-M12		
回程间隙 (Backlash)	7arcmin					AB系列		Tel/电话: 0533-6288333 6288444			A. AB. 180.	
				P2 L1		Fax/传真: 0533-6288411						
						Web/网址: www.newstart.cn						

1

2

3

4

5

6