

1

2

3


4


5

6

输入端 Input

输出端 Output

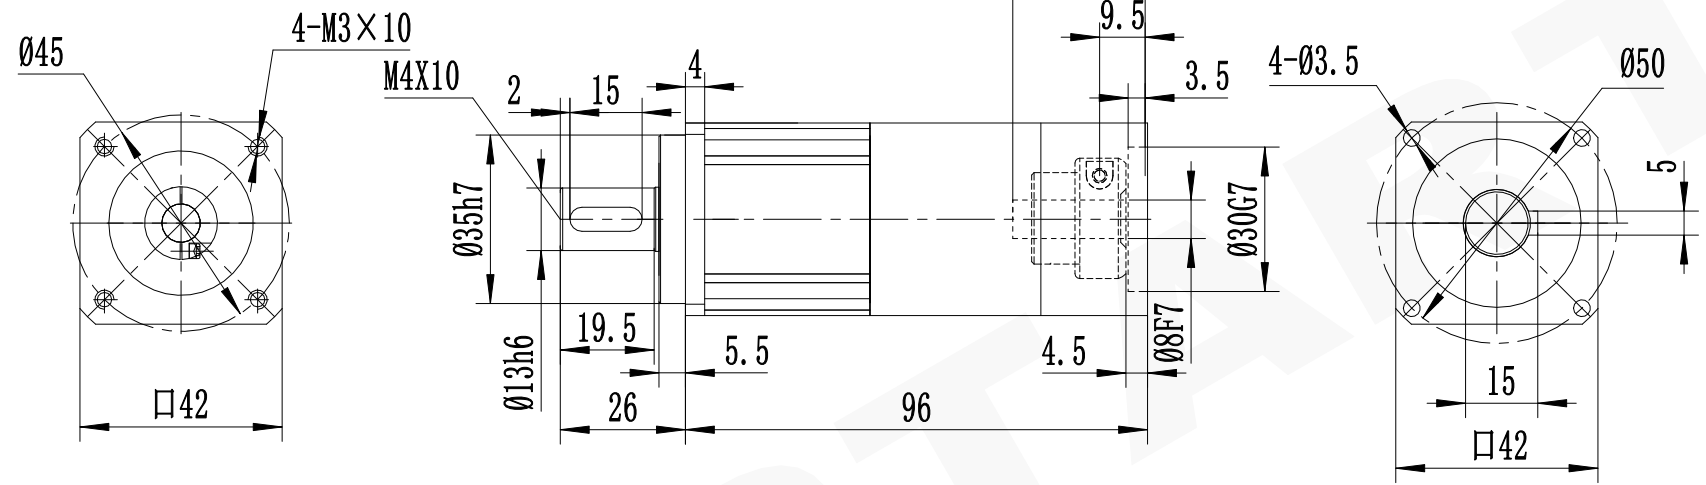

减速比 (Ratio i)	i 推荐	60/64/80/100/120/160/200		未注线性尺寸极限偏差 Unmarked tolerance	
	i 不推荐	256/320	512	0.5-3	$\pm 0.2$
额定承载扭矩 (Rated load torque)	Nm	23	18	3-6	$\pm 0.3$
最大加速力矩 (Max. acceleration torque)	Nm	41.4	32.4	6-30	$\pm 0.5$
急停扭矩 (Emergency stop torque)	Nm	69	54	30-120	$\pm 0.8$
*备注三级减速机需与厂家沟通				120-400	$\pm 1.2$
精密行星减速机技术参数				400-1000	$\pm 2$
容许最大径向载荷 (Max. radial load)	770N	空载力矩 20℃ (No-load torque)	$\leq 0.05Nm$	精密行星减速机 Precision Planetary Gear Boxes	
容许最大轴向载荷 (Max. axial load)	380N	润滑 (Lubrication)	合成润滑油 (Synthetic grease)		
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	$\geq 20000h$	AB042L3-i-P2-S2	
噪音 (Noise)	$\leq 58db$	防护等级 (Protection grade)	IP54	8-25-30-45-M3	
回程间隙 (Backlash)	9arcmin	AB系列	Tel/电话: 0533-6288333 6288444	A. AB. 042.	
		P2 L3	Fax/传真: 0533-6288411		
			Web/网址: www.newstart.cn		

1

2

3

4

5

6