

A

B

C


D

A

B

C

D

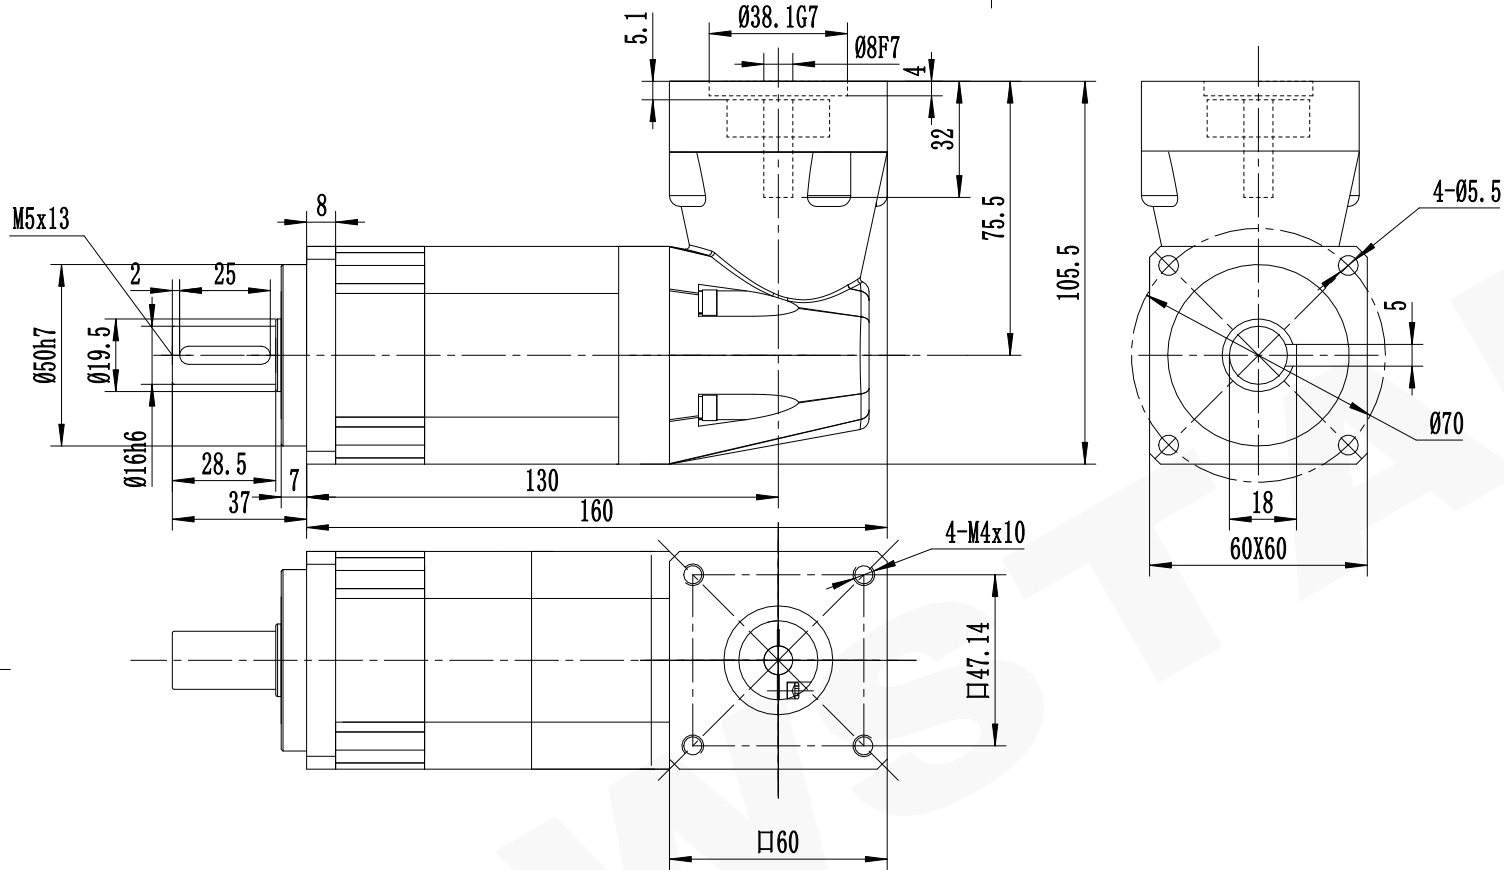

| 减速比 (Ratio i) | i 推荐 | 60/64/80/100/120/160/200 | |
|-----------------------------------|-------|--------------------------|-------------|
| | i 不推荐 | 256/320 | 512 |
| 额定承载扭矩 (Rated load torque) | Nm | 65 | 45 |
| 最大加速力矩 (Max. acceleration torque) | Nm | 117 | 81 |
| 急停扭矩 (Emergency stop torque) | Nm | 195 | 135 |
| *备注三级减速机需与厂家沟通 | | | 400-1000 ±2 |

| | |
|----------------------------------|------|
| 未注线性尺寸极限偏差 Unmarked tolerance | |
| 0.5-3 | ±0.2 |
| 3-6 | ±0.3 |
| 6-30 | ±0.5 |
| 30-120 | ±0.8 |
| 120-400 | ±1.2 |
| 400-1000 | ±2 |

| 精密行星减速机技术参数 | | | | | 精密行星减速机 Precision Planetary Gear Boxes | |
|------------------------------|-----------|--------------------------------|--|---|--|--|
| 容许最大径向载荷 (Max. radial load) | 1500N | 空载力矩 (No-load torque) | | ≤ 0.1Nm | | |
| 容许最大轴向载荷 (Max. axial load) | 760N | 润滑 (Lubrication) | | 合成润滑油 | | |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | | -15℃~+90℃ | | |
| 最大输入转速 (Max input speed) | 6000r/min | 使用寿命 (Service life) | | ≥20000h | | |
| 噪音 (Noise) | ≤ 63db | 防护等级 (Protection grade) | | IP54 | | |
| 回程间隙 (Backlash) | 13arcmin | ABR 系列 | | Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn | | |
| | | P2 L3 | | A. ABR. 060. | | |