

1

2

3

4

5




6

A

B

C

D

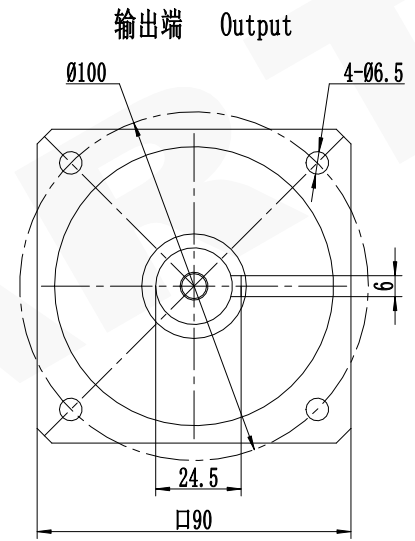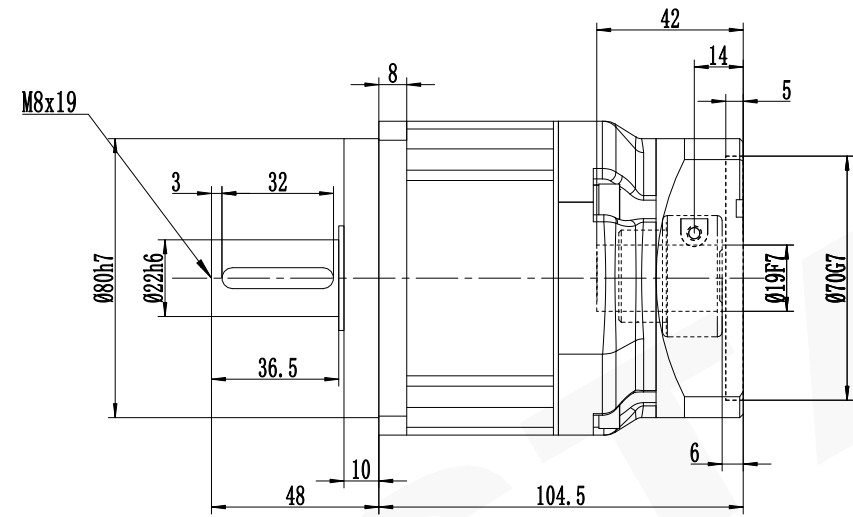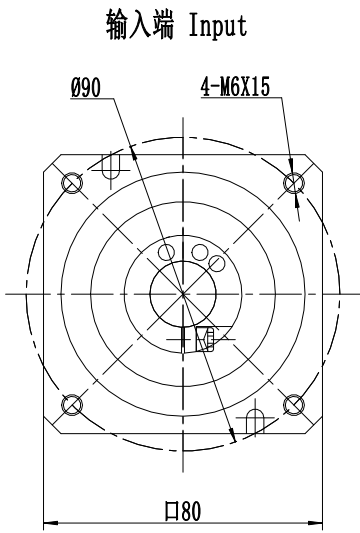

A

B

C

D

精密行星减速机技术参数										未注线性尺寸极限偏差 Unmarked tolerance	
减速比 (Ratio i)	i	3	4	5	6	7	8	9	10	0.5-3	±0.2
额定承载扭矩 (Rated load torque)	Nm	135	165	160	145	135	115	105	105	3-6	±0.3
最大加速力矩 (Max. acceleration torque)	Nm	243	297	288	261	243	207	189	189	6-30	±0.5
急停扭矩 (Emergency stop torque)	Nm	405	495	480	435	405	345	315	315	30-120	±0.8
容许最大径向载荷 (Max. radial load)										120-400	±1.2
容许最大轴向载荷 (Max. axial load)										400-1000	±2
空载力矩 20℃ (No-load torque)										≤ 0.2Nm	
润滑 (Lubrication)										合成润滑脂 (Synthetic grease)	
额定输入转速 (Nominal input speed)										-15℃~+90℃	
使用环境温度 (Operation temperature)										≥20000h	
使用寿命 (Service life)										IP54	
噪音 (Noise)										防护等级 (Protection grade)	
回程间隙 (Backlash)										AB系列	
										P2 L1	
Tel/电话: 0533-6288333 6288444										Fax/传真: 0533-6288411	
										Web/网址: www.newstart.cn	
精密行星减速机										Precision Planetary Gear Boxes	
										NEWSTART 纽氏达特	
										AB090L1-i-P2-S2	
										19-40-70-90-M6	
										A. AB. 090.	