


A

B

C

D

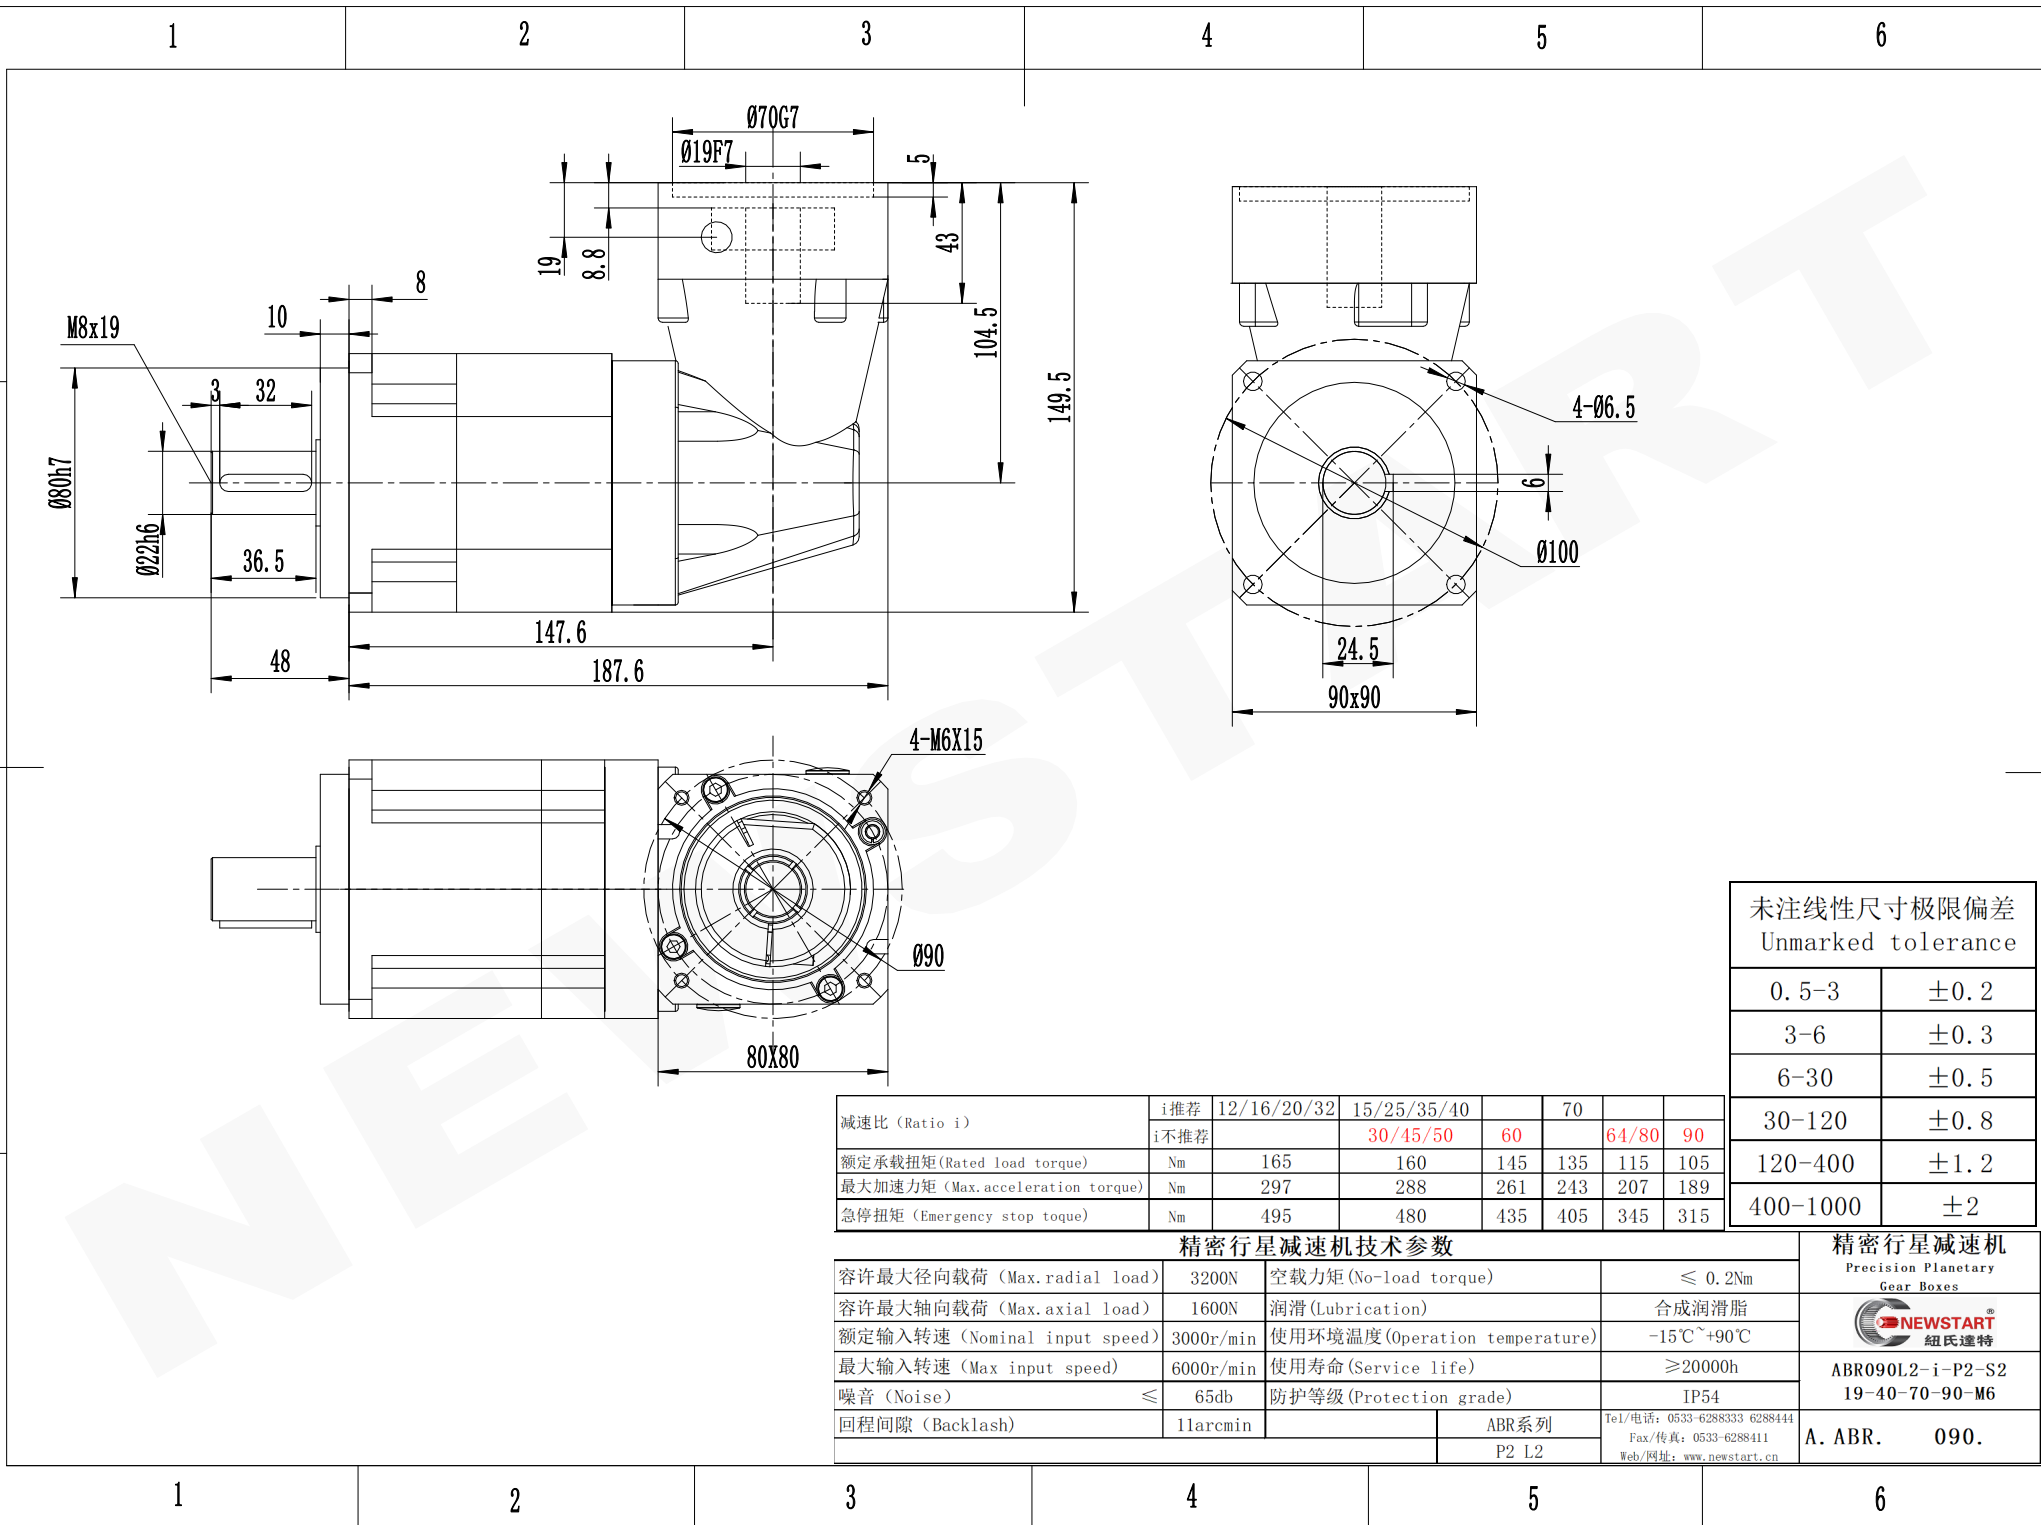

A


B

C

D

| 未注线性尺寸极限偏差 Unmarked tolerance | |
|----------------------------------|------|
| 0.5-3 | ±0.2 |
| 3-6 | ±0.3 |
| 6-30 | ±0.5 |
| 30-120 | ±0.8 |
| 120-400 | ±1.2 |
| 400-1000 | ±2 |

| 减速比 (Ratio i) | i 推荐 | 12/16/20/32 | 15/25/35/40 | | 70 | | |
|-----------------------------------|-------|-------------|-------------|-----|-------|-----|-----|
| | i 不推荐 | | 30/45/50 | 60 | 64/80 | 90 | |
| 额定承载扭矩 (Rated load torque) | Nm | 165 | 160 | 145 | 135 | 115 | 105 |
| 最大加速力矩 (Max. acceleration torque) | Nm | 297 | 288 | 261 | 243 | 207 | 189 |
| 急停扭矩 (Emergency stop torque) | Nm | 495 | 480 | 435 | 405 | 345 | 315 |

| 精密行星减速机技术参数 | | | | 精密行星减速机 Precision Planetary Gear Boxes |
|------------------------------|-----------|--------------------------------|---|---|
| 容许最大径向载荷 (Max. radial load) | 3200N | 空载力矩 (No-load torque) | ≤ 0.2Nm |  紐氏達特 |
| 容许最大轴向载荷 (Max. axial load) | 1600N | 润滑 (Lubrication) | 合成润滑油 | |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | -15℃~+90℃ | |
| 最大输入转速 (Max input speed) | 6000r/min | 使用寿命 (Service life) | ≥20000h | |
| 噪音 (Noise) | ≤ 65db | 防护等级 (Protection grade) | IP54 | ABR090L2-i-P2-S2 19-40-70-90-M6 |
| 回程间隙 (Backlash) | 11arcmin | ABR系列 | Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn | A. ABR. 090. |
| | | P2 L2 | | |