

1 2 3 4 5 6

A

B

C

D


A

B



C

D

输出端  
Output

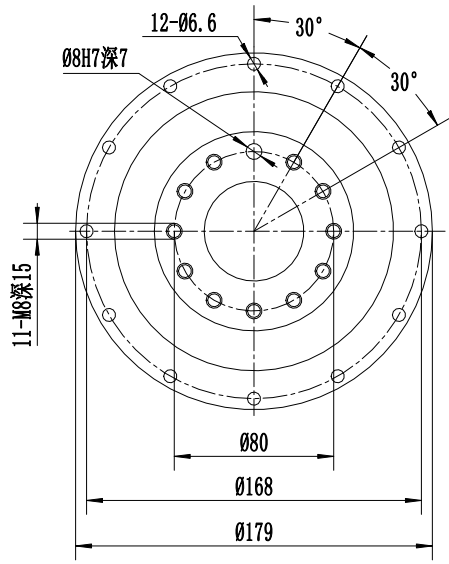


输出端  
Input

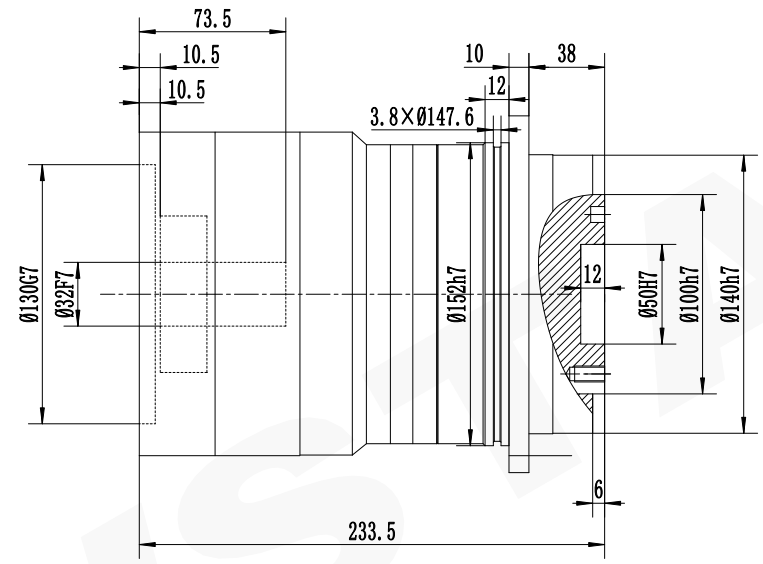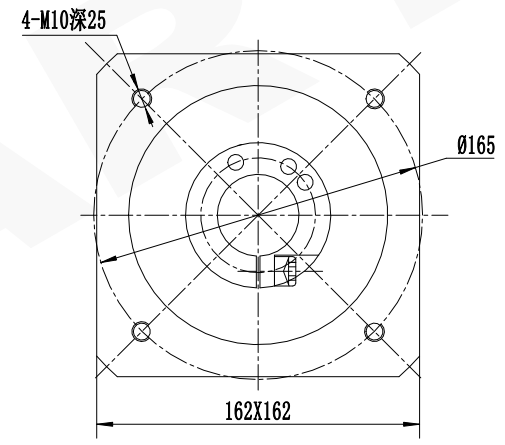

减速比 (Ratio i)		12	15	16	25	32	35	40	30	50	64
额定承载扭矩 (Rated load torque)	Nm	700	650	700	650	700	650	650	650	650	510
最大加速力矩 (Max.acceleration torque)	Nm	1260	1170	1260	1170	1260	1170	1170	1170	1170	918
急停扭矩 (Emergency stop toque)	Nm	2100	1950	2100	1950	2100	1950	1950	1950	1950	1530

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2

精密行星减速机技术参数						精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max. radial load)	13700N	空载力矩20℃ (No-load torque)		≤ 0.72Nm			AD140L2-i-P2-0P2 32-58-130-165-M10
容许最大轴向载荷 (Max. axial load)	8800N	润滑 (Lubrication)		合成润滑脂 (Synthetic grease)			
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)		-15℃~+90℃			
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)		≥20000h			
噪音 (Noise)	≤ 65db	防护等级 (Protection grade)		IP54			
回程间隙 (Backlash)	7arcmin		AD系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn		A. AD. 140.
			P2 L2				

1 2 3 4 5 6