

1

2

3

4

5

6



A

B


C

D

输出端Output

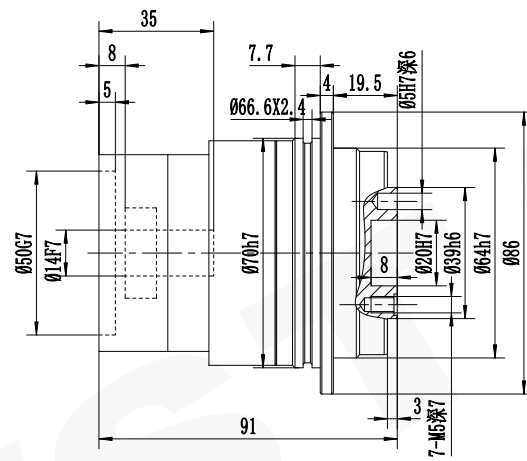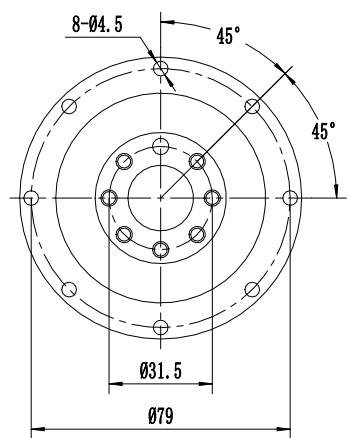

输入端Input



未注线性尺寸极限偏差
Unmarked tolerance

0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2

减速比 (Ratio i)		4	5	6	7	8	9	10
额定承载扭矩 (Rated load torque)	Nm	65	60	52	50	45	42	42
最大加速力矩 (Max.acceleration torque)	Nm	117	108	93.6	90	81	75.6	75.6
急停扭矩 (Emergency stop torque)	Nm	195	180	156	150	135	126	126

精密行星减速机技术参数

容许最大径向载荷 (Max.radial load)	3150N	空载力矩20℃ (No-load torque)	≤ 0.1Nm
容许最大轴向载荷 (Max.axial load)	2400N	润滑 (Lubrication)	合成润滑脂 (Synthetic grease)
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	≥20000h
噪音 (Noise)	≤ 60db	防护等级 (Protection grade)	IP54
回程间隙 (Backlash)	5arcmin	AD系列	
		P2 L1	

精密行星减速机
Precision Planetary
Gear Boxes



AD064L1-i-P2-0P2
14-30-50-70-M4

A. AD. 064.

Tel/电话: 0533-6288333 6288444
Fax/传真: 0533-6288411
Web/网址: www.newstart.cn

1

2

3

4

5

6

A

B

C

D