

1

2

3

4

5

6



A

B


C

D

输出端

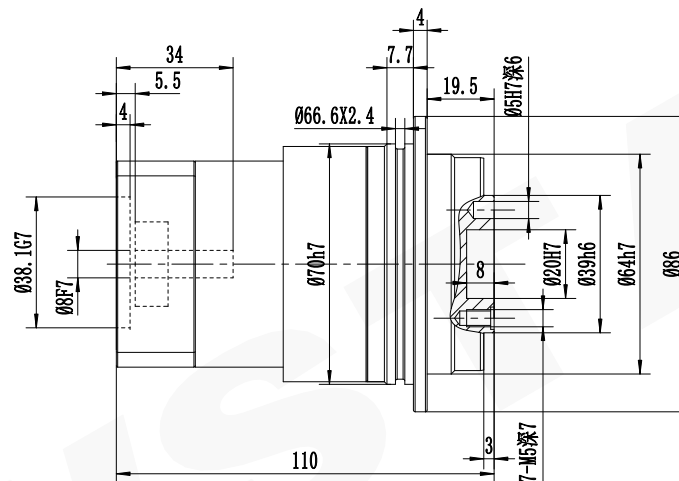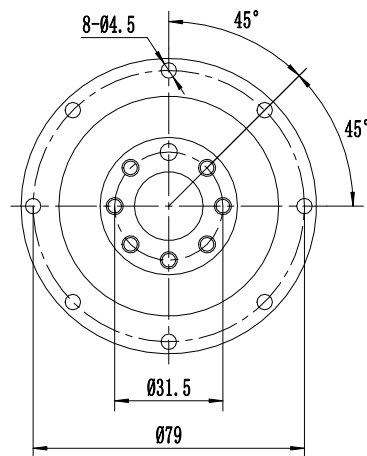

输入端

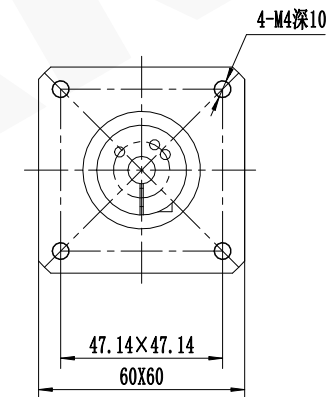

未注线性尺寸极限偏差
Unmarked tolerance

| | |
|----------|------|
| 0.5-3 | ±0.2 |
| 3-6 | ±0.3 |
| 6-30 | ±0.5 |
| 30-120 | ±0.8 |
| 120-400 | ±1.2 |
| 400-1000 | ±2 |

| | | | | | | | | | | |
|--------------------------------------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|
| 减速比 (Ratio i) | 12 | 15 | 16 | 25 | 32 | 35 | 40 | 30 | 50 | 64 |
| 额定承载扭矩 (Rated load torque) Nm | 65 | 60 | 64 | 60 | 65 | 60 | 60 | 60 | 60 | 45 |
| 最大加速力矩 (Max. acceleration torque) Nm | 117 | 108 | 115.2 | 108 | 117 | 108 | 108 | 108 | 108 | 81 |
| 急停扭矩 (Emergency stop torque) Nm | 195 | 180 | 192 | 180 | 195 | 180 | 180 | 180 | 180 | 135 |

精密行星减速机技术参数

| | | | |
|------------------------------|-----------|--------------------------------|------------------------------|
| 容许最大径向载荷 (Max. radial load) | 3150N | 空载力矩20℃ (No-load torque) | ≤ 0.1Nm |
| 容许最大轴向载荷 (Max. axial load) | 2400N | 润滑 (Lubrication) | 合成润滑脂 (Synthetic grease) |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | -15℃~+90℃ |
| 最大输入转速 (Max input speed) | 6000r/min | 使用寿命 (Service life) | ≥20000h |
| 噪音 (Noise) ≤ | 60db | 防护等级 (Protection grade) | IP54 |
| 回程间隙 (Backlash) | 7arcmin | AD系列 | Tel/电话: 0533-6288333 6288444 |
| | | P2 L2 | Fax/传真: 0533-6288411 |
| | | | Web/网址: www.newstart.cn |

精密行星减速机
Precision Planetary
Gear Boxes



AD064L2-i-P2-0P2
8-24-38.1-□47.14-M4
A. AD. 064.

1

2

3

4

5

6

A

B

C

D