

1

2

3

4

5



6

A

B

C

D

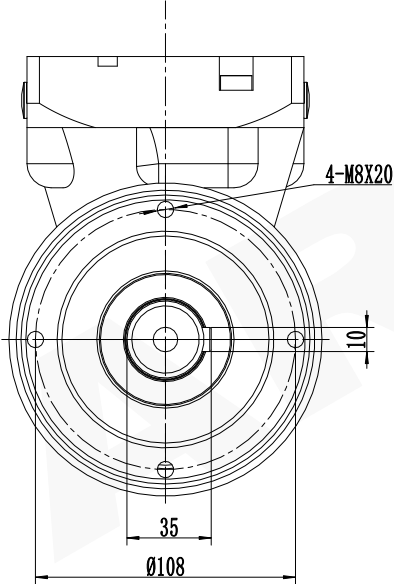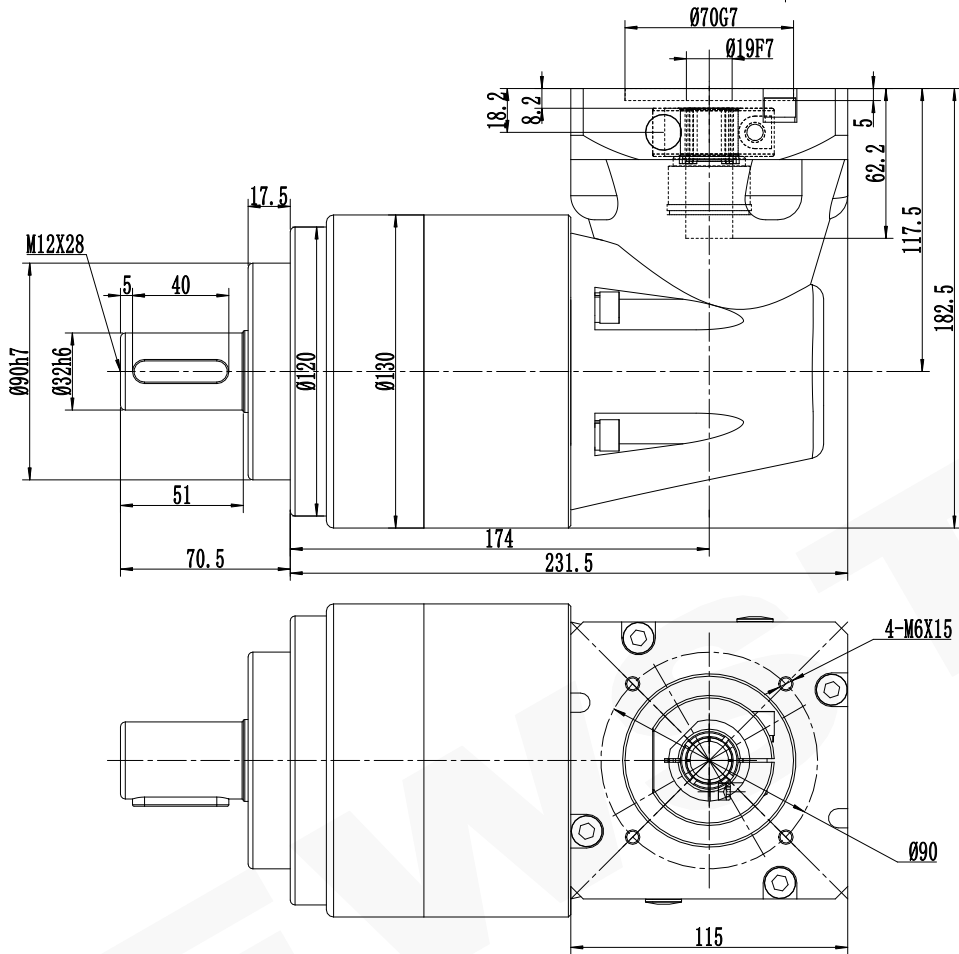

A

B


C

D

减速比 (Ratio i)	i 推荐	12/16/20/32	15/25/35/40		70		
	i 不推荐		30/45/50	60	64/80	90	
额定承载扭矩 (Rated load torque)	Nm	345	335	300	290	265	255
最大加速力矩 (Max. acceleration torque)	Nm	621	603	540	522	477	459
急停扭矩 (Emergency stop torque)	Nm	1035	1005	900	870	795	765

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2

精密行星减速机技术参数			
容许最大径向载荷 (Max. radial load)	2900N	空载力矩20℃ (No-load torque)	≤ 0.36Nm
容许最大轴向载荷 (Max. axial load)	1950N	润滑 (Lubrication)	合成润滑脂
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	≥20000h
噪音 (Noise)	≤ 68db	防护等级 (Protection grade)	IP54
回程间隙 (Backlash)	11arcmin	AER系列	Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn
		P2 L2	

精密行星减速机 Precision Planetary Gear Boxes
 紐氏達特
AER120L2-i-P2-S2 19-40-70-90-M6
A. AER. 120.

1

2

3

4

5

6