

1



2

3

4

5

6

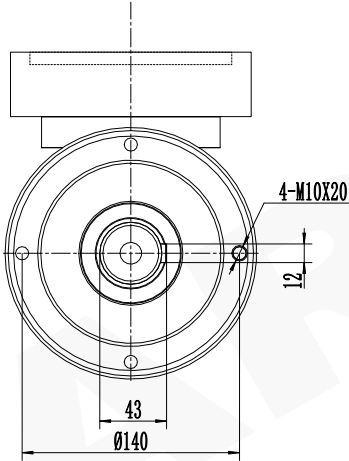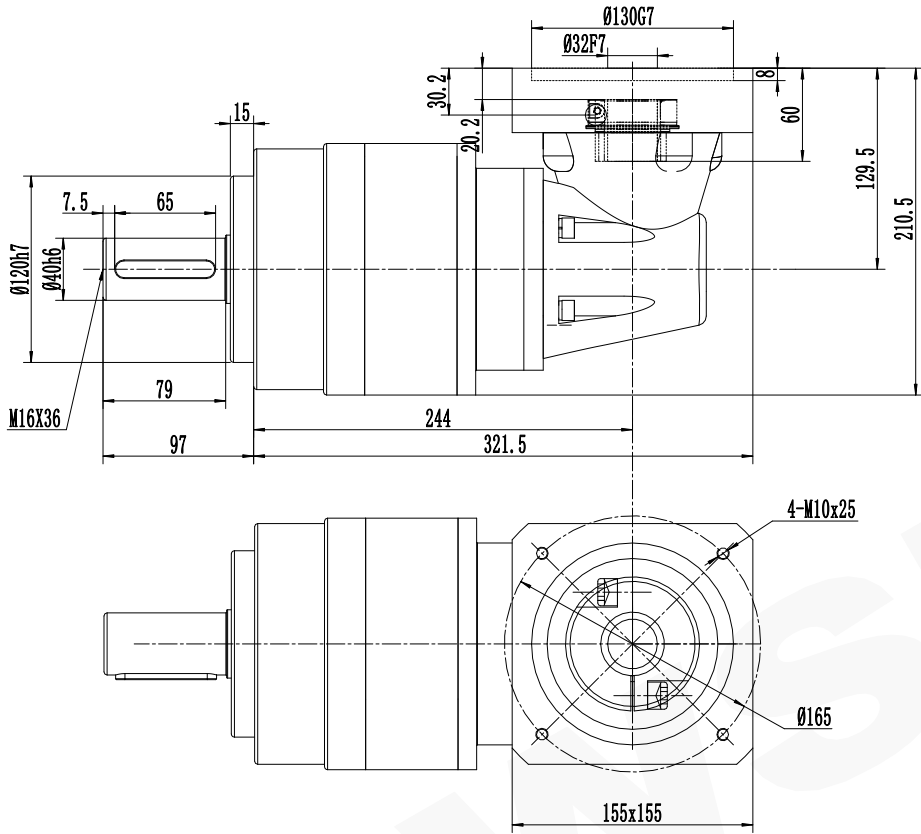

减速比 (Ratio i)		i推荐	60/64/80/100/120/160/200		未注线性尺寸极限偏差 Unmarked tolerance	
		i不推荐	256/320	512	0.5-3	±0.2
额定承载扭矩 (Rated load torque)		Nm	700	510	3-6	±0.3
最大加速力矩 (Max.acceleration torque)		Nm	1260	918	6-30	±0.5
急停扭矩 (Emergency stop torque)		Nm	2100	1530	30-120	±0.8
*备注三级减速机需与厂家沟通					120-400	±1.2
					400-1000	±2
精密行星减速机技术参数					精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max.radial load)	5700N	空载力矩20℃ (No-load torque)		≤ 0.36Nm	 AER155L3-i-P2-S2 32-58-130-165-M10	
容许最大轴向载荷 (Max.axial load)	3150N	润滑 (Lubrication)		合成润滑油		
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)		-15℃~+90℃	AER155L3-i-P2-S2 32-58-130-165-M10	
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)		≥20000h		
噪音 (Noise)	≤ 70db	防护等级 (Protection grade)		IP54	A. AER. 155.	
回程间隙 (Backlash)	15arcmin	AER系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn		

1

2

3

4

5

6