

1

2

3

4

5



6

A


B

C

D

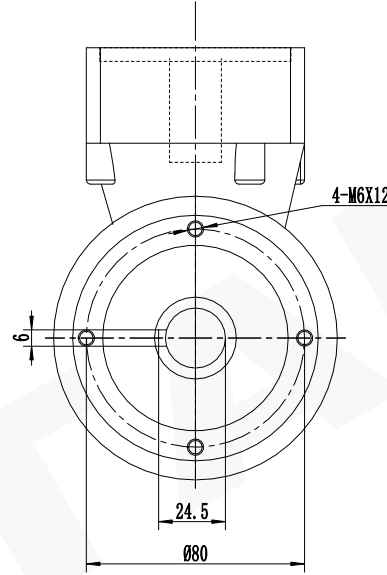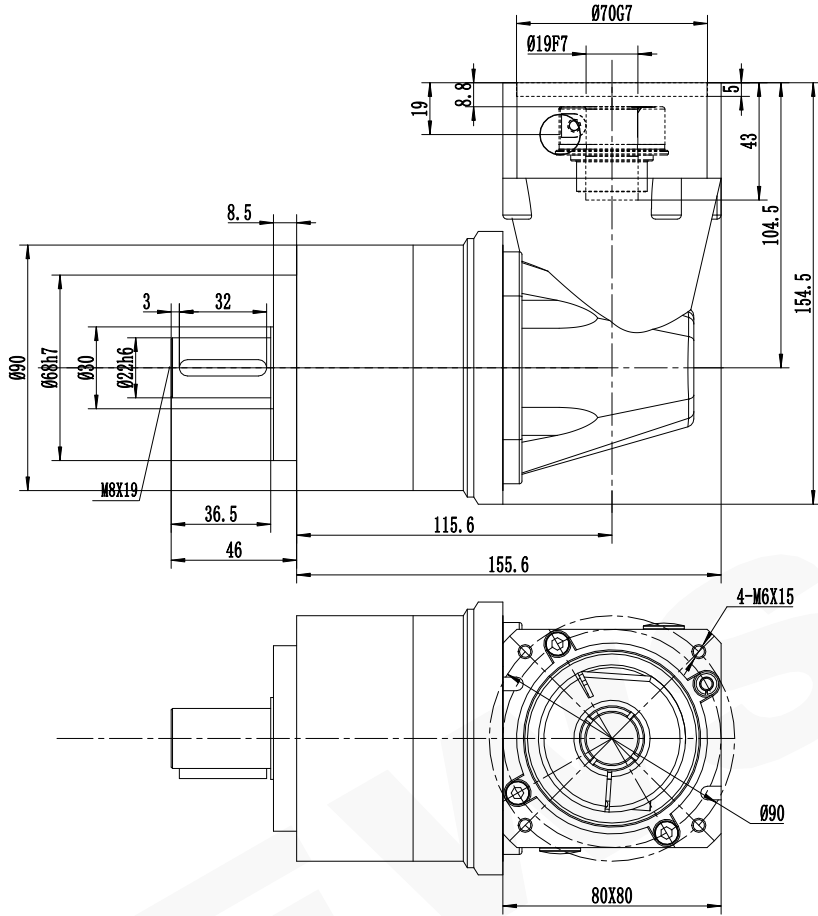

减速比 (Ratio i)	i	3	4	5	6	7	8	9	10	未注线性尺寸极限偏差 Unmarked tolerance	
额定承载扭矩 (Rated load torque)	Nm	135	165	160	145	135	115	105	105	0.5-3	±0.2
最大加速力矩 (Max. acceleration torque)	Nm	243	297	288	261	243	207	189	189	3-6	±0.3
急停扭矩 (Emergency stop torque)	Nm	405	495	480	435	405	345	315	315	6-30	±0.5
										30-120	±0.8
										120-400	±1.2
										400-1000	±2

精密行星减速机技术参数					精密行星减速机	
容许最大径向载荷 (Max.radial load)	1600N	空载力矩20℃ (No-load torque)		≤ 0.2Nm		
容许最大轴向载荷 (Max.axial load)	1500N	润滑 (Lubrication)		合成润滑油		
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)		-15℃~+90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)		≥20000h	AER090L1-i-P2-S2 19-40-70-90-M6	
噪音 (Noise)	≤ 65db	防护等级 (Protection grade)		IP54		
回程间隙 (Backlash)	9arcmin	AER系列		Tel/电话: 0533-6288333 6288444	A. AER. 090.	
		P2 L1		Fax/传真: 0533-6288411		
				Web/网址: www.newstart.cn		

1

2

3

4

5

6

A

B

C

D