

A

B

C


D

A

B

C

D

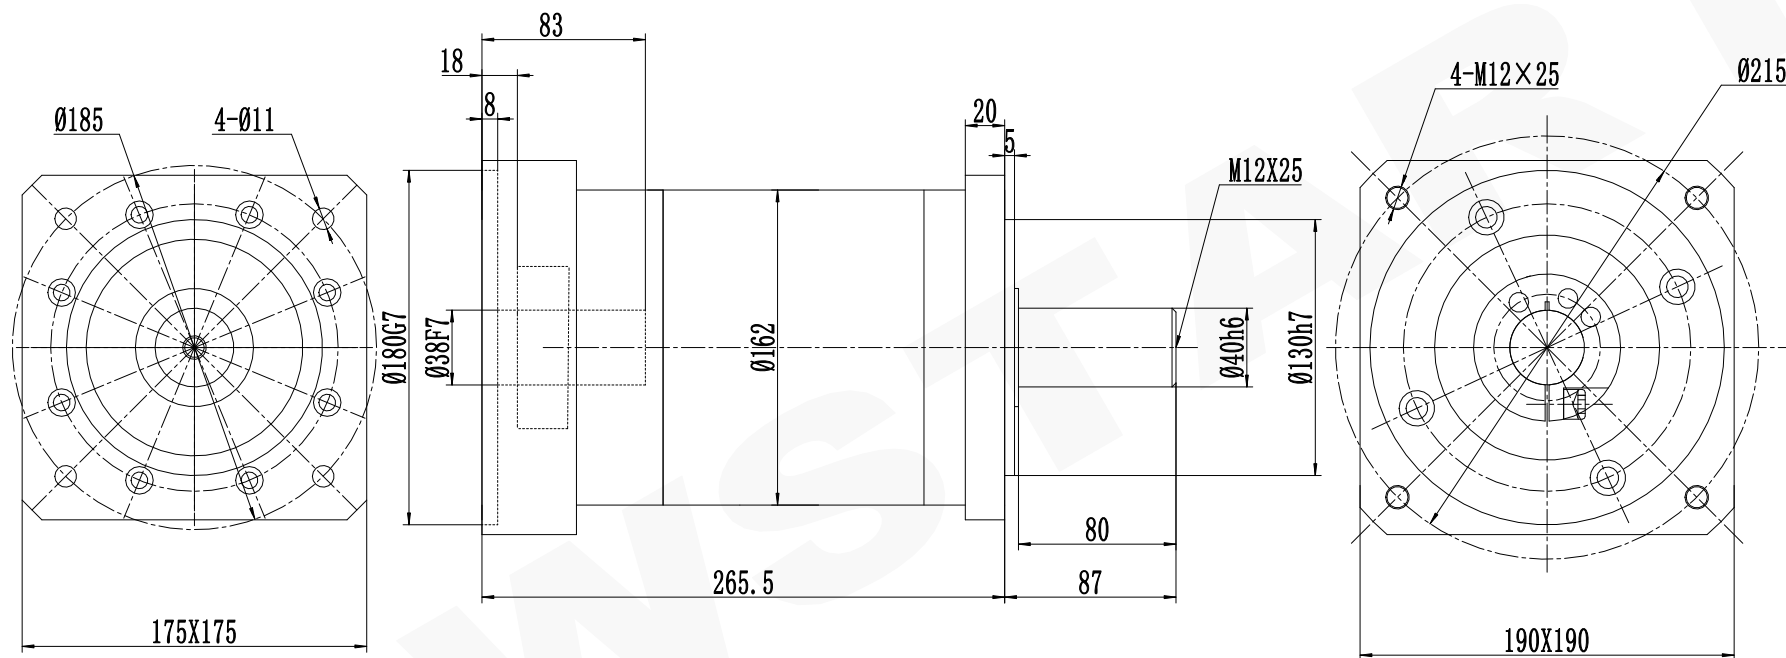

减速比 (Ratio i)		60/64/80/160/256	100/120/200/320	512	6-30	±0.5
额定承载扭矩 (Rated load torque)	Nm	800	700	450	30-120	±0.8
最大加速力矩 (Max. acceleration torque)	Nm	1440	1260	810	120-400	±1.2
急停扭矩 (Emergency stop torque)	Nm	2400	2100	1350	400-1000	±2
精密行星减速机技术参数					精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max. radial load)	3600N	空载力矩20℃ (No-load torque)	≤ 0.72Nm		 PF142L3-i-P2-S2 38-80-180-215-M12	
容许最大轴向载荷 (Max. axial load)	8000N	润滑 (Lubrication)	合成润滑脂 (Synthetic grease)			
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃			
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)	≥20000h			
噪音 (Noise)	≤ 65db	防护等级 (Protection grade)	IP54			
回程间隙 (Backlash)	20arcmin		PL系列	Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn	A. PF. 142.	
			P2 L3			