

1

2

3

4

5

6



A

B


C


D

输出端
Output

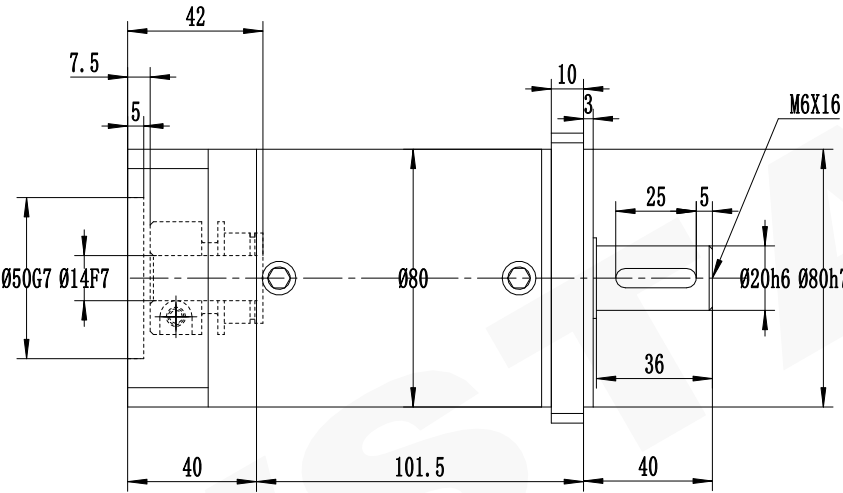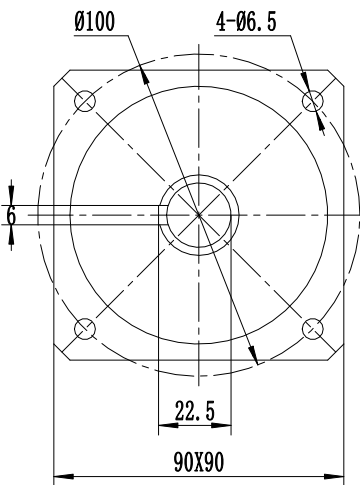

输入端
Input

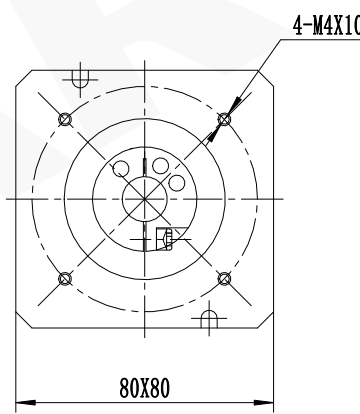

未注线性尺寸极限偏差 Unmarked tolerance				0.5-3	±0.2
				3-6	±0.3
				6-30	±0.5
				30-120	±0.8
				120-400	±1.2
				400-1000	±2
精密行星减速机技术参数					
减速比 (Ratio i)	60/64/80/160/256		100/120/200/320	512	
额定承载扭矩 (Rated load torque)	Nm	110	90	50	
最大加速力矩 (Max. acceleration torque)	Nm	198	162	90	
急停扭矩 (Emergency stop torque)	Nm	330	270	150	
容许最大径向载荷 (Max. radial load)	900N	空载力矩20℃ (No-load torque)	≤ 0.2Nm		
容许最大轴向载荷 (Max. axial load)	1200N	润滑 (Lubrication)	合成润滑油 (Synthetic grease)		
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	≥20000h		
噪音 (Noise)	≤ 60db	防护等级 (Protection grade)	IP54		
回程间隙 (Backlash)	20arcmin	PL系列	Tel/电话: 0533-6288333 6288444		
		P2 L3	Fax/传真: 0533-6288411		
			Web/网址: www.newstart.cn		
				精密行星减速机 Precision Planetary Gear Boxes	
					
				PF080L3-i-P2-S2 14-30-50-70-M4	
				A. PF. 080.	

1

2

3

4

5

6

A

B

C

D