

1 2 3 4 5 6

A

B

C


D

A

B

C

D

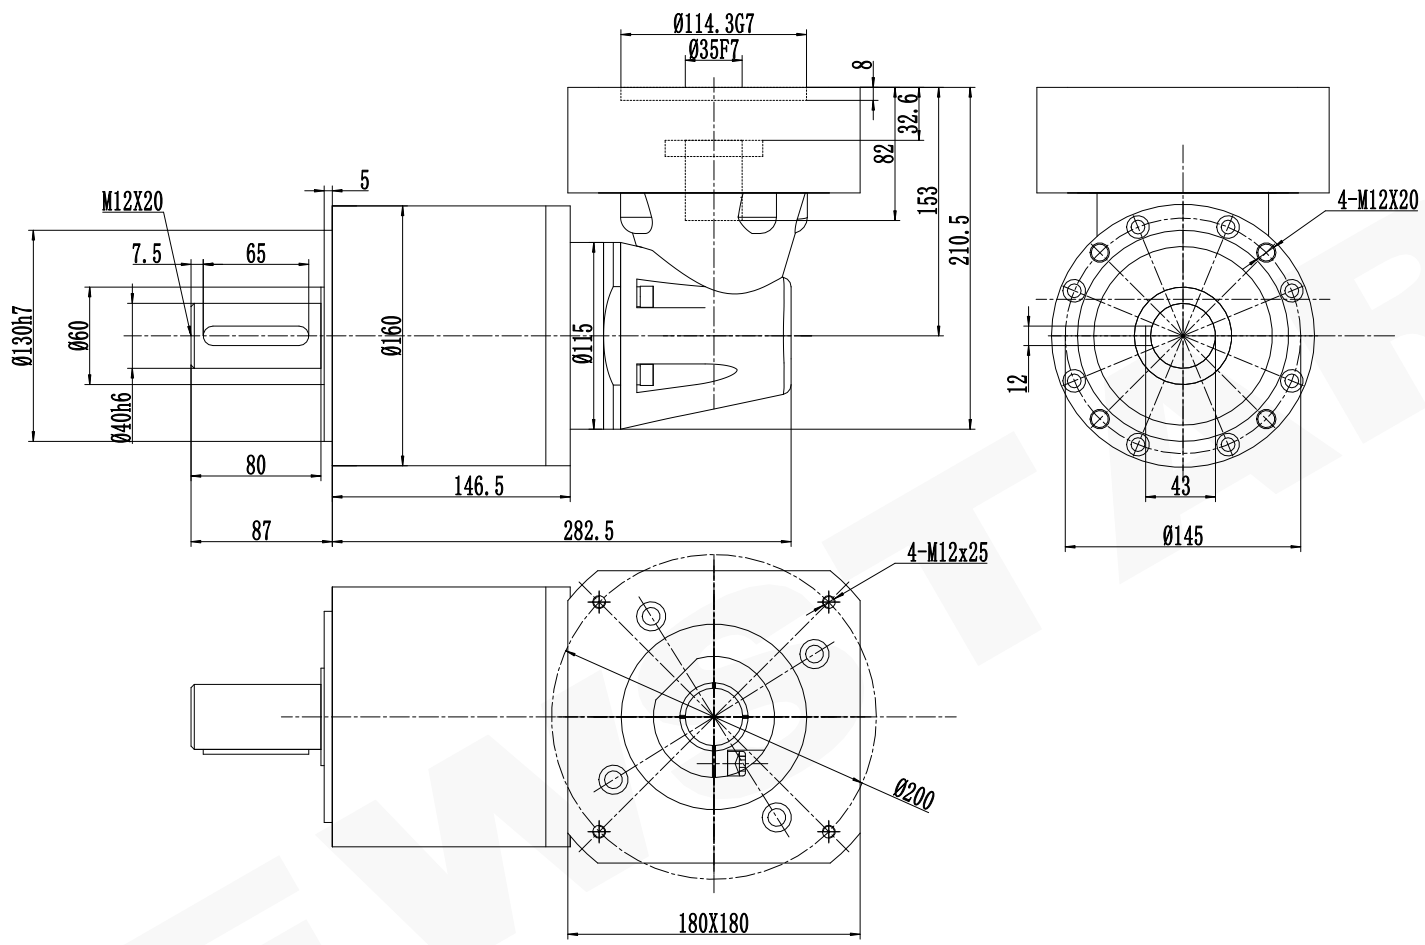

减速比 (Ratio i)		60/64/80/160/256	100/120/200/320	512
额定承载扭矩(Rated load torque)	Nm	800	700	450
最大加速力矩 (Max.acceleration torque)	Nm	1440	1260	810
急停扭矩 (Emergency stop toque)	Nm	2400	2100	1350
精密行星减速机技术参数				
容许最大径向载荷 (Max.radial load)	3600N	空载力矩20℃ (No-load torque)		≤ 0.72Nm
容许最大轴向载荷 (Max.axial load)	8000N	润滑 (Lubrication)		合成润滑油 (Synthetic grease)
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)		-15℃~+90℃
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)		≥20000h
噪音 (Noise)	≤ 70db	防护等级 (Protection grade)		IP54
回程间隙 (Backlash)	18arcmin	WPL系列		Tel/ 电话: 0533-6288333 6288444
		P2 L3		Fax/ 传真: 0533-6288411
				Web/ 网址: www.newstart.cn

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	± 0.2
3-6	± 0.3
6-30	± 0.5
30-120	± 0.8
120-400	± 1.2
400-1000	± 2
精密行星减速机 Precision Planetary Gear Boxes	
 紐氏達特	
WPL160L3-i-P2-S2 35-79-114.3-200-M12	
A. WPL.	160.

1 2 3 4 5 6