

1 2 3 4 5 6


A

B


C

D

输出端 Output

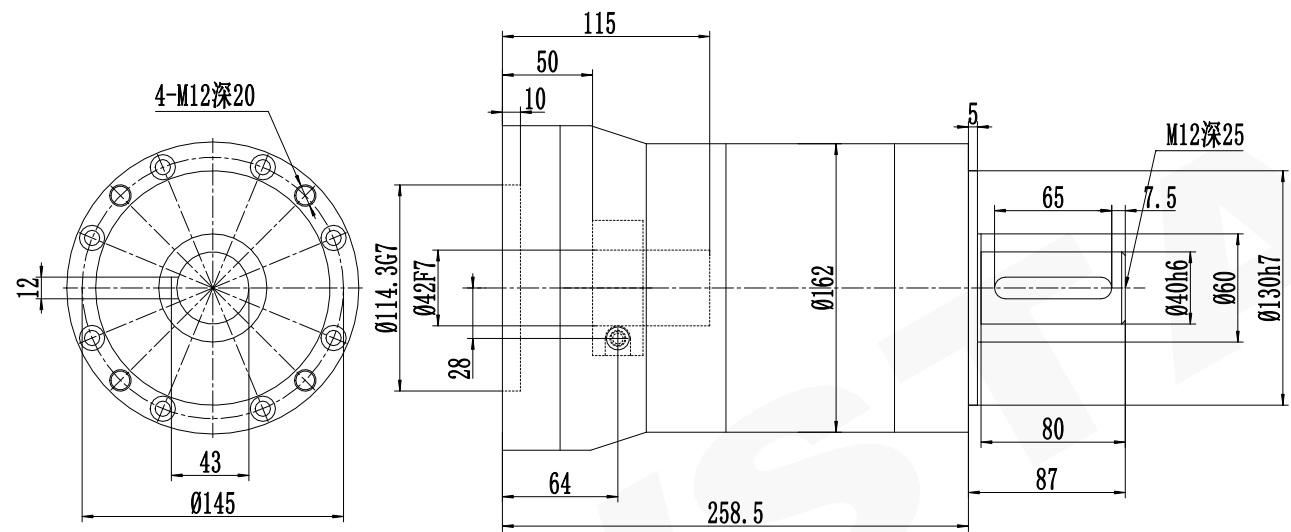


输入端 Input

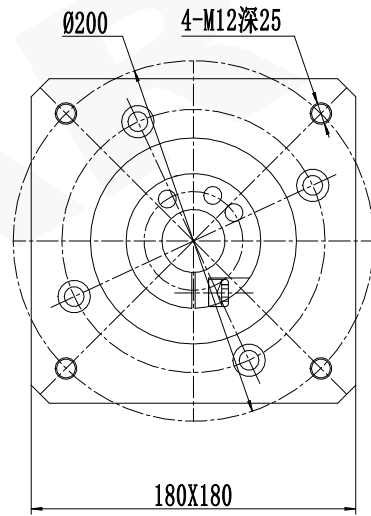

减速比 (Ratio i)	9	12/16/20/32	15/40/25/50/30	64/80					未注线性尺寸极限偏差 Unmarked tolerance
额定承载扭矩 (Rated load torque) Nm	400	800	700	450					0.5-3 ±0.2
最大加速力矩 (Max. acceleration torque) Nm	720	1440	1260	810					3-6 ±0.3
急停扭矩 (Emergency stop torque) Nm	1200	2400	2100	1350					6-30 ±0.5
									30-120 ±0.8
									120-400 ±1.2
									400-1000 ±2

精密行星减速机技术参数

容许最大径向载荷 (Max. radial load)	3600N	空载力矩20℃ (No-load torque)	≤ 0.72Nm	精密行星减速机 Precision Planetary Gear Boxes
容许最大轴向载荷 (Max. axial load)	8000N	润滑 (Lubrication)	合成润滑脂 (Synthetic grease)	
额定输入转速 (Nominal input speed)	2000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃	
最大输入转速 (Max input speed)	4000r/min	使用寿命 (Service life)	≥20000h	PL160L2-i-P2-S2
噪音 (Noise)	≤ 65db	防护等级 (Protection grade)	IP54	42-113-114.3-200-M12
回程间隙 (Backlash)	12arcmin	PL系列	Tel/电话: 0533-6288333 6288444	A. PL. 160.
		P2 L2	Fax/传真: 0533-6288411	
			Web/网址: www.newstart.cn	

1 2 3 4 5 6

A

B

C

D