

1

2

3

4

5


6

A


B

C

D

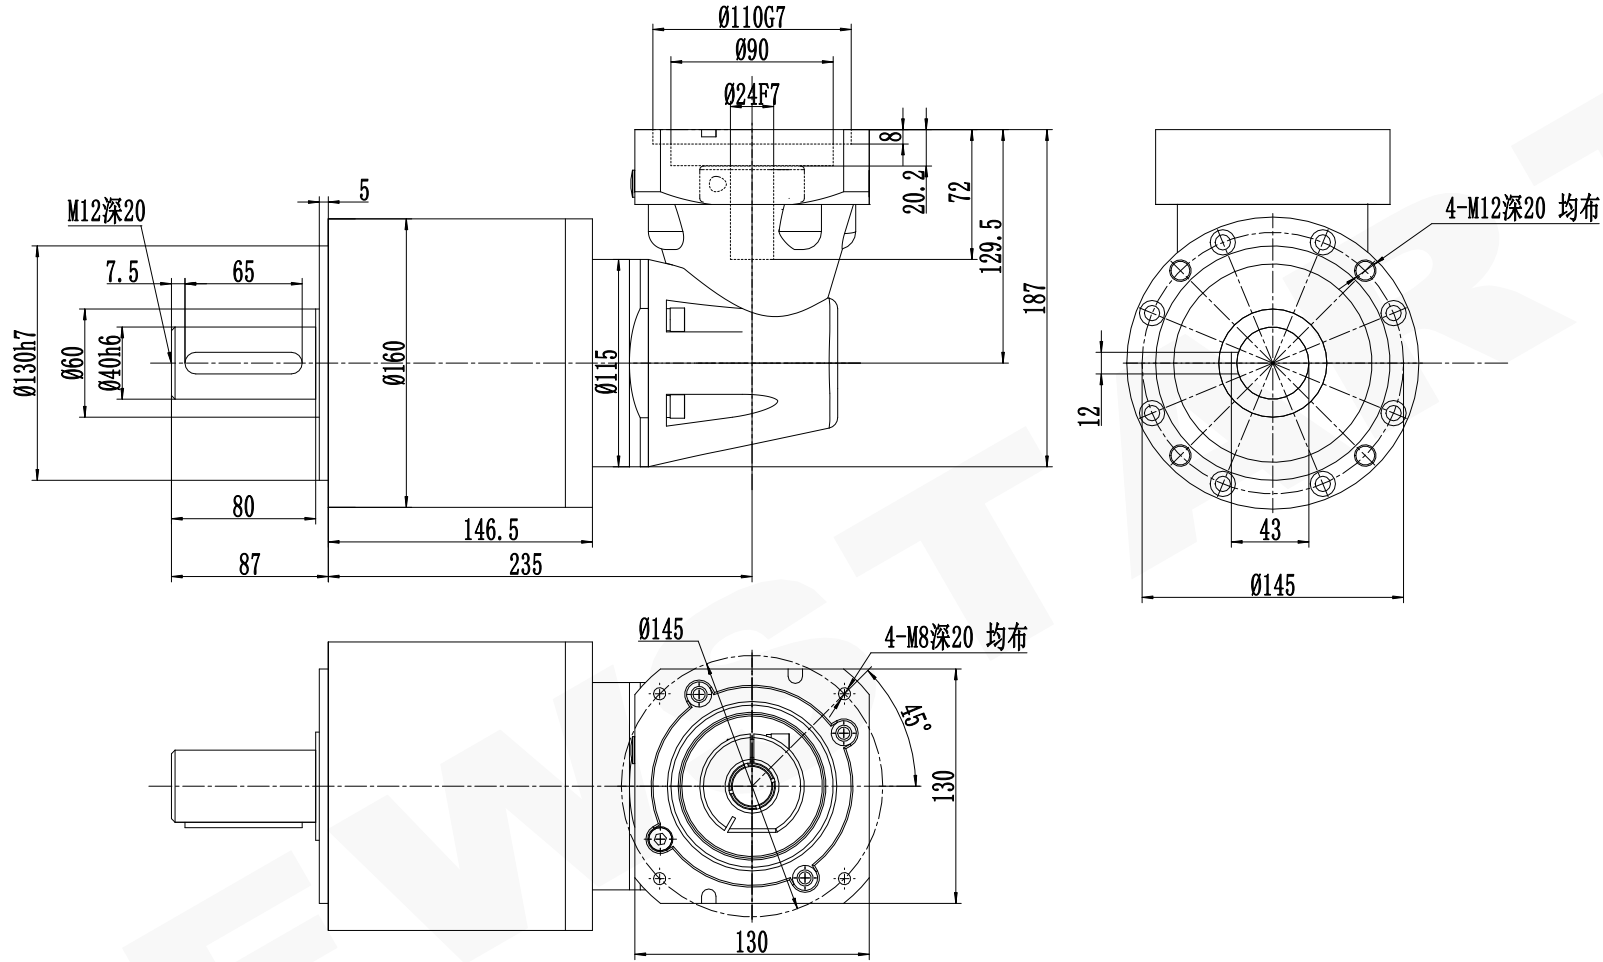

减速比 (Ratio i)		60/64/80/160/256	100/120/200/320	512
额定承载扭矩 (Rated load torque) Nm		800	700	450
最大加速力矩 (Max. acceleration torque) Nm		1440	1260	810
急停扭矩 (Emergency stop torque) Nm		2400	2100	1350
精密行星减速机技术参数				
容许最大径向载荷 (Max. radial load)		3600N	空载力矩20℃ (No-load torque)	≤ 0.72Nm
容许最大轴向载荷 (Max. axial load)		8000N	润滑 (Lubrication)	合成润滑油 (Synthetic grease)
额定输入转速 (Nominal input speed)		2000r/min	使用环境温度 (operation temperature)	-15℃~+90℃
最大输入转速 (Max input speed)		4000r/min	使用寿命 (Service life)	≥20000h
噪音 (Noise) ≤		70db	防护等级 (Protection grade)	IP54
回程间隙 (Backlash)		18arcmin	WPL系列	Tel/ 电话: 0533-6288333 6288444
			P2 L3	Fax/ 传真: 0533-6288411
				Web/ 网址: www.newstart.cn

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2
精密行星减速机 Precision Planetary Gear Boxes	
 紐氏達特	
WPL160L3-i-P2-S2 24-58-110-145-M8	
A. WPL.	160.

1

2

3

4

5

6

A

B

C

D