

1 2 3 4 5 6

A

B

C


D

A

B

C

D

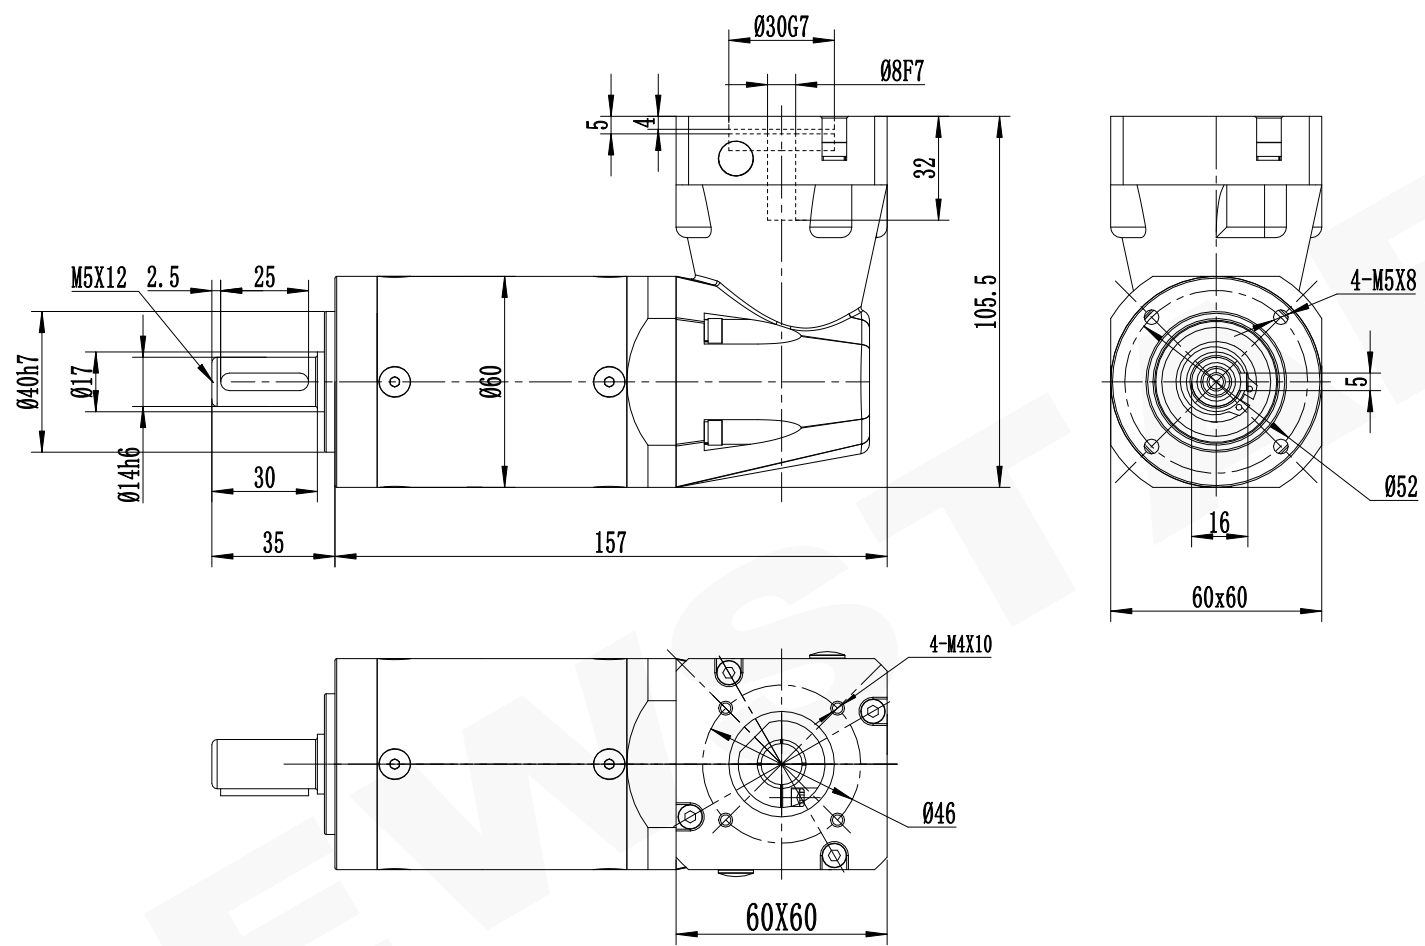

| | | | | |
|-----------------------------------|----|------------------|-----------------|------|
| 减速比 (Ratio i) | | 60/64/80/160/256 | 100/120/200/320 | 512 |
| 额定承载扭矩 (Rated load torque) | Nm | 45 | 41 | 18 |
| 最大加速力矩 (Max. acceleration torque) | Nm | 81 | 73.8 | 32.4 |
| 急停扭矩 (Emergency stop torque) | Nm | 135 | 123 | 54 |

| | |
|----------------------------------|------|
| 未注线性尺寸极限偏差 Unmarked tolerance | |
| 0.5-3 | ±0.2 |
| 3-6 | ±0.3 |
| 6-30 | ±0.5 |
| 30-120 | ±0.8 |
| 120-400 | ±1.2 |
| 400-1000 | ±2 |

| | | | |
|------------------------------|-----------|--------------------------------|---|
| 精密行星减速机技术参数 | | | |
| 容许最大径向载荷 (Max. radial load) | 480N | 空载力矩20℃ (No-load torque) | ≤ 0.1Nm |
| 容许最大轴向载荷 (Max. axial load) | 600N | 润滑 (Lubrication) | 合成润滑油 (Synthetic grease) |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | -15℃~+90℃ |
| 最大输入转速 (Max input speed) | 6000r/min | 使用寿命 (Service life) | ≥20000h |
| 噪音 (Noise) | ≤ 63db | 防护等级 (Protection grade) | IP54 |
| 回程间隙 (Backlash) | 18arcmin | WPL系列 | Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn |
| | | P2 L3 | |

精密行星减速机
Precision Planetary
Gear Boxes

WPL060L3-i-P2-S2
8-25-30-46-M4

A. WPL. 060.

1 2 3 4 5 6