

A

B

C




D

A

B

C

D

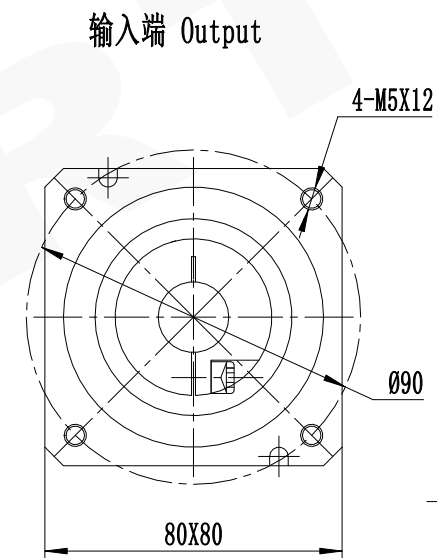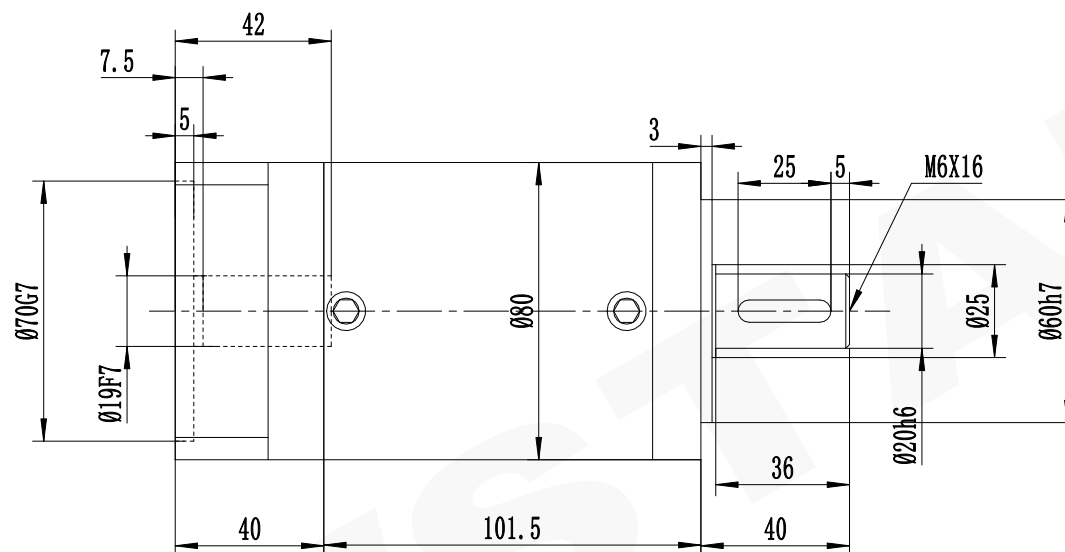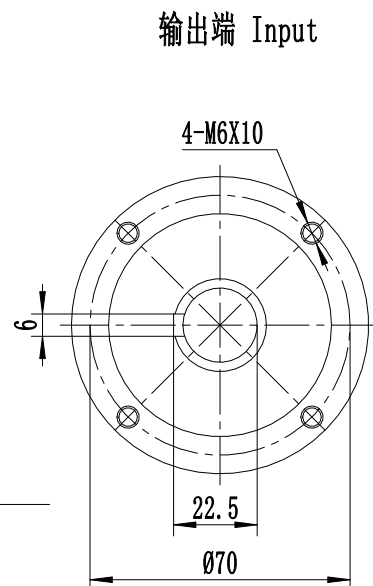

减速比 (Ratio i)	60/64/80/160/256	100/120/200/320	512	3-6	±0.3
额定承载扭矩(Rated load torque) Nm	110	90	50	6-30	±0.5
最大加速力矩 (Max.acceleration torque) Nm	198	162	90	30-120	±0.8
急停扭矩 (Emergency stop torque) Nm	330	270	150	120-400	±1.2
				400-1000	±2

精密行星减速机技术参数					精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max.radial load)	900N	空载力矩20℃(No-load torque)		≤ 0.2Nm		
容许最大轴向载荷 (Max.axial load)	1200N	润滑(Lubrication)		合成润滑油 (Synthetic grease)		
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度(Operation temperature)		-15℃~+90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命(Service life)		≥20000h		
噪音 (Noise)	≤ 60db	防护等级(Protection grade)		IP54		
回程间隙 (Backlash)	14arcmin	PL 系列		Tel/电话: 0533-6288333 6288444		
		P2 L3		Fax/传真: 0533-6288411		
				Web/网址: www.newstart.cn		
					A. PL. 080.	