

1

2

3

4

5

6



A

B


C

D

输出端
OutPut

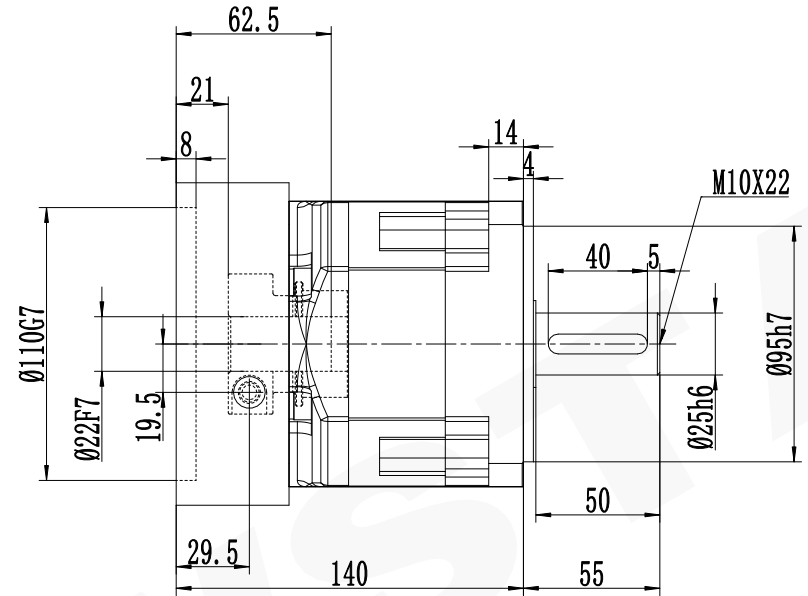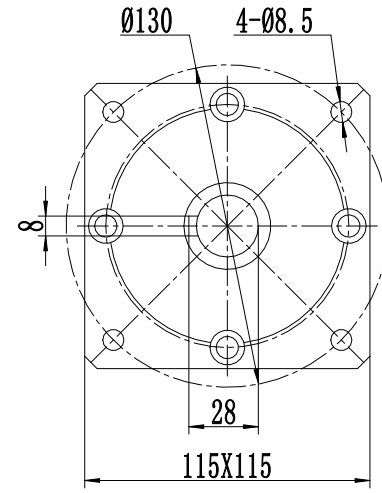

输入端
InPut

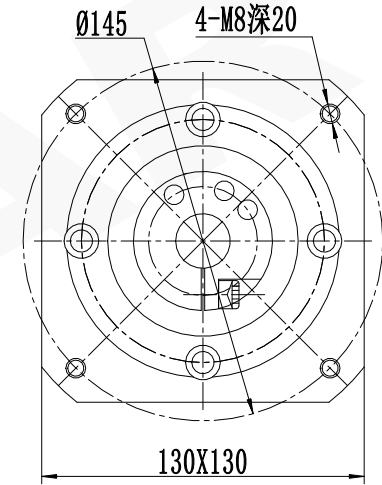


A

B

C

D

减速比 (Ratio i)		3	4	5	6	8	10	3-6	±0.3	
额定承载扭矩(Rated load torque)		Nm	125	260	230	128	120	70	6-30	±0.5
最大加速力矩 (Max.acceleration torque)		Nm	225	468	414	230.4	216	126	30-120	±0.8
急停扭矩 (Emergency stop toque)		Nm	375	780	690	384	360	210	120-400	±1.2
									400-1000	±2
精密行星减速机技术参数									精密行星减速机	
									Precision Planetary	
									Gear Boxes	
容许最大径向载荷 (Max.radial load)	1850N	空载力矩20℃(No-load torque)				≤ 0.36Nm			 紐氏達特	
容许最大轴向载荷 (Max.axial load)	2800N	润滑(Lubrication)				合成润滑油 (Synthetic grease)				
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度(Operation temperature)				-15℃~+90℃			PS115L1-i-P2-S2 22-58-110-145-M8	
最大输入转速 (Max input speed)	6000r/min	使用寿命(Service life)				≥20000h				
噪音 (Noise)	≤ 63db	防护等级(Protection grade)				IP54			A. PS. 115.	
回程间隙 (Backlash)	8arcmin			PS系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn				
				P2 L1						

1

2

3

4

5

6