


1 2 3 4 5 6

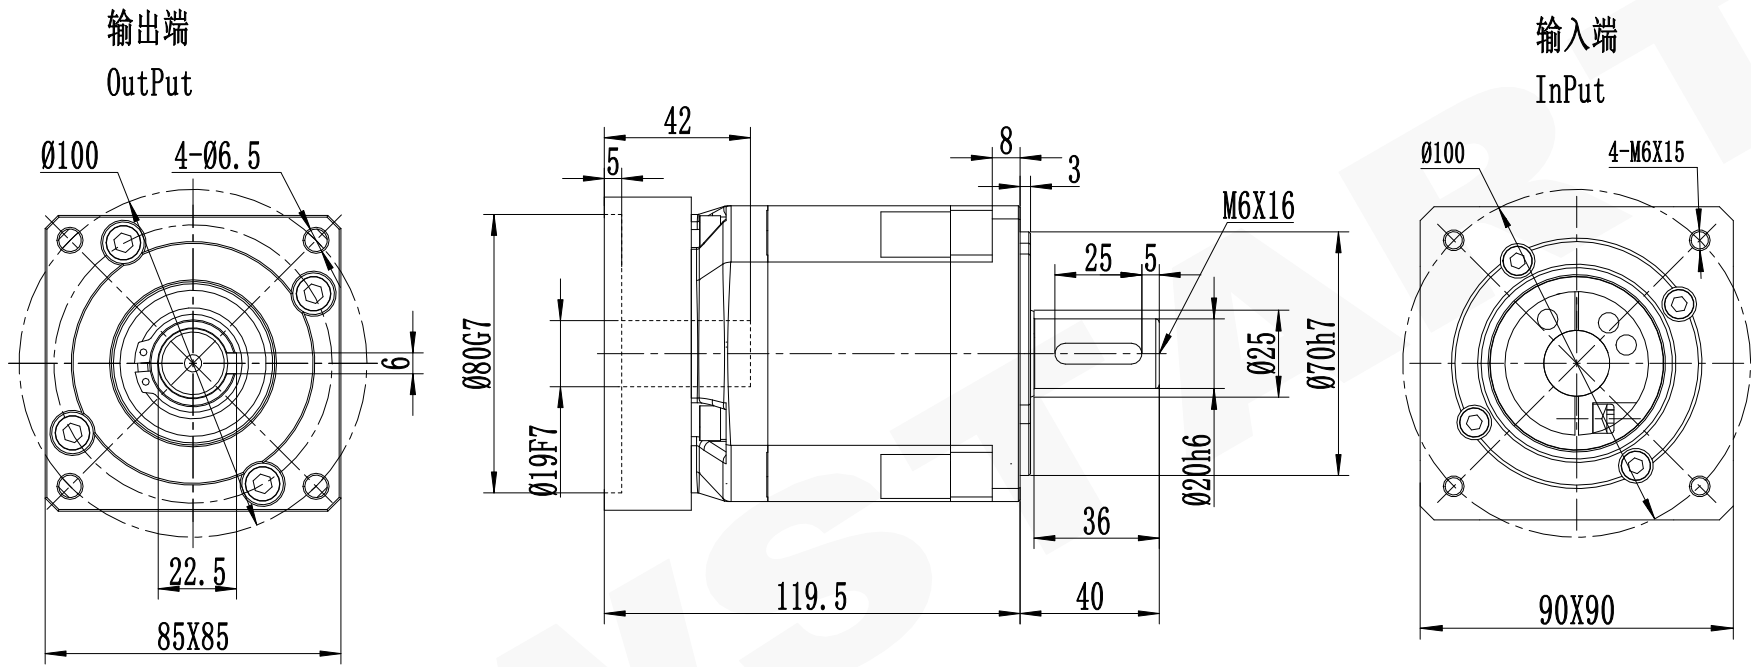

精密行星减速机技术参数								精密行星减速机	
减速比 (Ratio i)	9	12/16/20/32	15/40/25/50/30	64/80				未注线性尺寸极限偏差	
额定承载扭矩 (Rated load torque) Nm	40	110	90	50				Unmarked tolerance	
最大加速力矩 (Max. acceleration torque) Nm	72	198	162	90				0.5-3	±0.2
急停扭矩 (Emergency stop torque) Nm	120	330	270	150				3-6	±0.3
								6-30	±0.5
								30-120	±0.8
								120-400	±1.2
								400-1000	±2
容许最大径向载荷 (Max. radial load)	900N	空载力矩20℃ (No-load torque)		≤ 0.2Nm				精密行星减速机	
容许最大轴向载荷 (Max. axial load)	1200N	润滑 (Lubrication)		合成润滑油 (Synthetic grease)				Precision Planetary Gear Boxes	
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)		-15℃~+90℃				NEWSTART 纽氏达特	
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)		≥20000h				PS090L2-i-P2-S2	
噪音 (Noise)	≤ 60db	防护等级 (Protection grade)		IP54				19-40-80-100-M6	
回程间隙 (Backlash)	10arcmin			PS系列		Tel/电话: 0533-6288333 6288444		A. PS.	
				P2 L2		Fax/传真: 0533-6288411		090.	
						Web/网址: www.newstart.cn			

1 2 3 4 5 6