

1





2


3

4

5

6

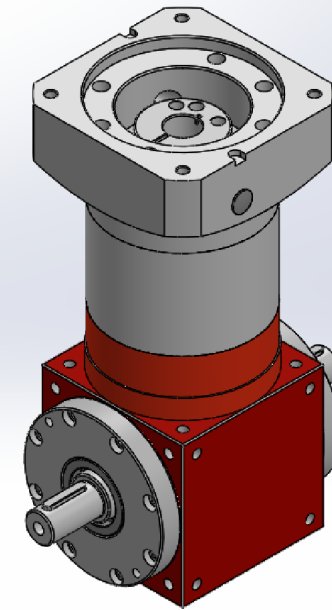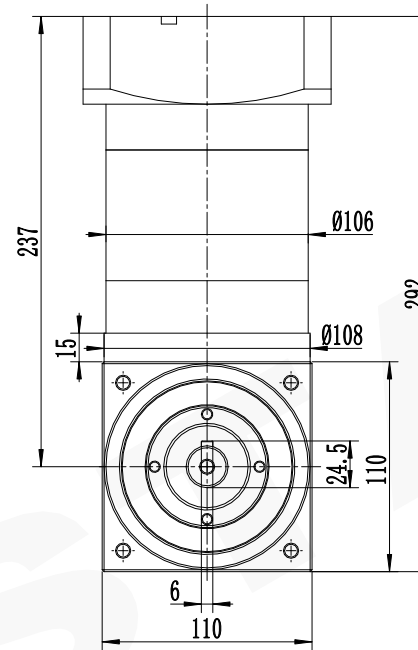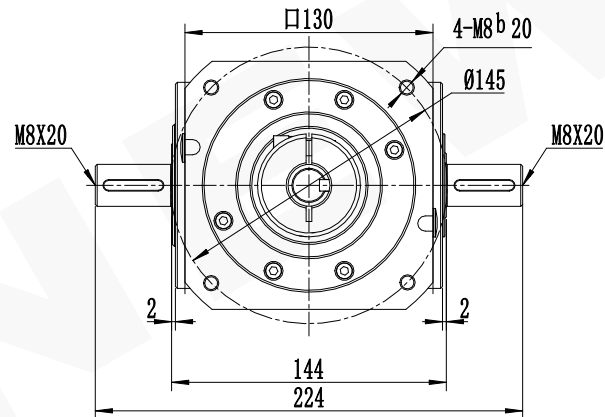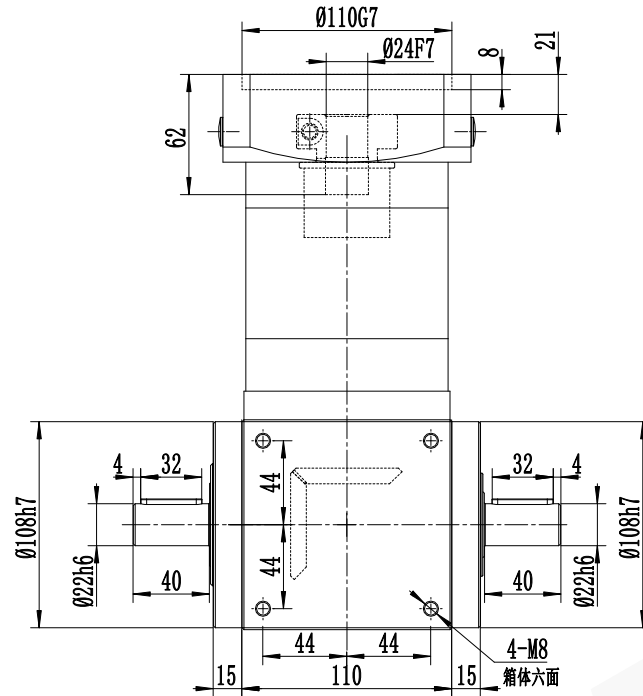

减速比 (Ratio i)		12	15	16	20	25	30	32	40	50	6-30	±0.5
额定承载扭矩 (Rated load torque)	Nm	150									30-120	±0.8
最大加速力矩 (Max.acceleration torque)	Nm	225									120-400	±1.2
急停扭矩 (Emergency stop torque)	Nm	450									400-1000	±2
精密行星减速机技术参数											精密行星减速机	
											Precision Planetary Gear Boxes	
容许最大径向载荷 (Max.radial load)	2100N	空载力矩20℃ (No-load torque)				≤ 0.36Nm					 NEWSTART® 纽氏達特	
容许最大轴向载荷 (Max.axial load)	1050N	润滑 (Lubrication)				合成润滑脂 (Synthetic grease)						
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)				-15℃ +90℃					PW110L2-i-S2-24-58- 110-145-M8	
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)				≥20000h						
噪音 (Noise)	≤ 68db	防护等级 (Protection grade)				IP54						
回程间隙 (Backlash)	10arcmin					PW系列		Tel/电话: 0533-6288333 6288444			A. PW. 110.	
						P2 L2		Fax/传真: 0533-6288411 Web/网址: www.newstart.cn				