

1

2

3

4

5





6

A

B

C

D

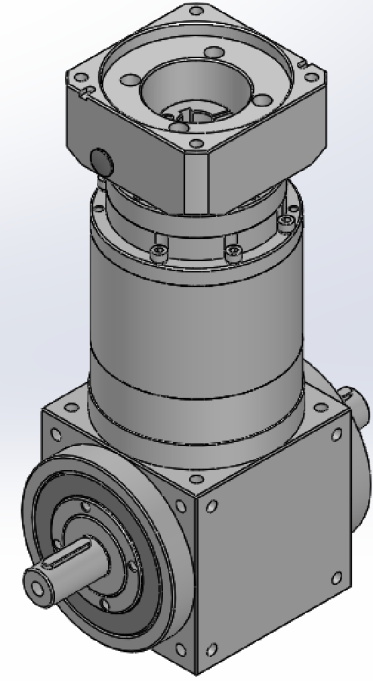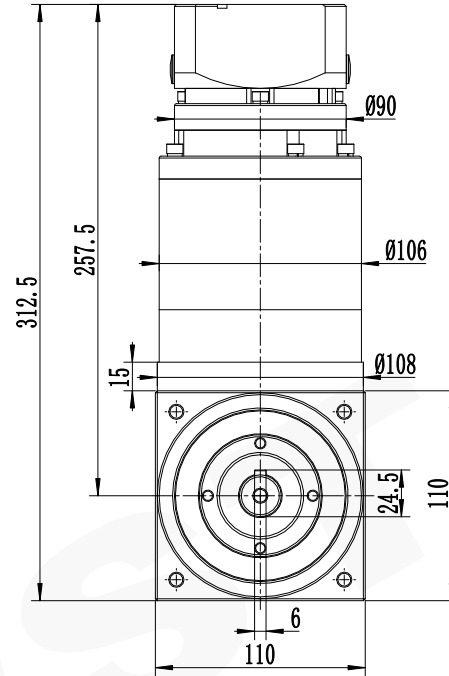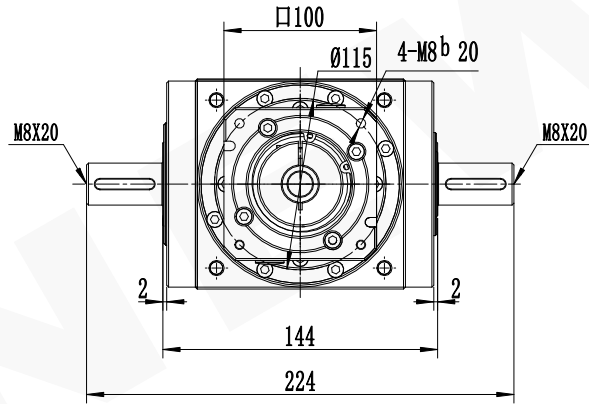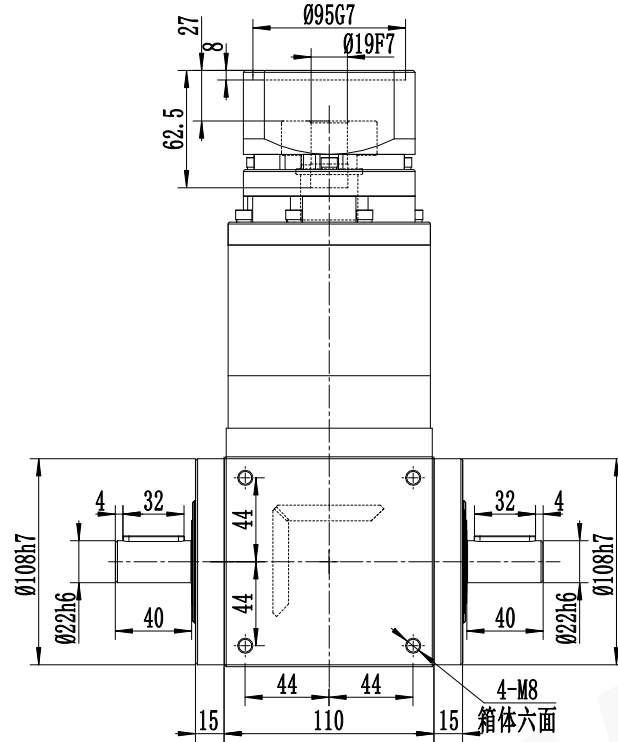


A

B

C

D

减速比 (Ratio i)		60	64	80	100	120	125	150	160	200	6-30	±0.5	
额定承载扭矩 (Rated load torque)		Nm					150					30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm					225					120-400	±1.2
急停扭矩 (Emergency stop toque)		Nm					450					400-1000	±2
精密行星减速机技术参数											精密行星减速机		
容许最大径向载荷 (Max.radial load)		2100N	空载力矩20℃ (No-load torque)				≤ 0.36Nm				Precision Planetary Gear Boxes		
容许最大轴向载荷 (Max.axial load)		1050N	润滑 (Lubrication)				合成润滑脂 (Synthetic grease)						
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度 (Operation temperature)				-15℃ +90℃				紐氏達特		
最大输入转速 (Max input speed)		6000r/min	使用寿命 (Service life)				≥20000h				PW110L3-i-S2-19-55-95-115-M8		
噪音 (Noise)		≤ 68db	防护等级 (Protection grade)				IP54				A. PW. 110.		
回程间隙 (Backlash)		12arcmin	PW系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn								
			P2 L3										

未注线性尺寸极限偏差
Unmarked tolerance

0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2

1

2

3

4

5

6