

1

2

3

4

5




6

A

B

C

D

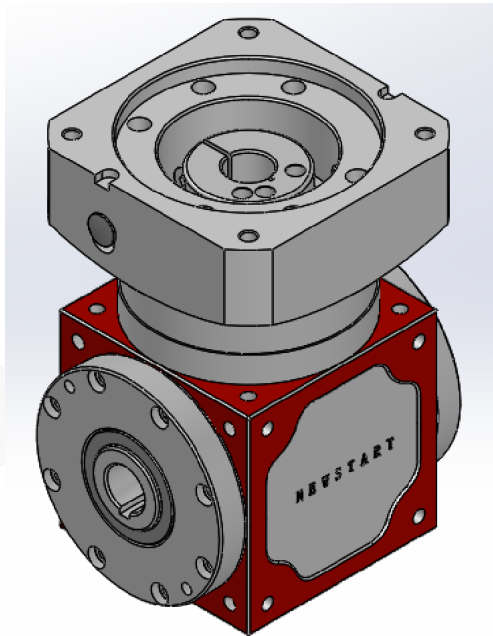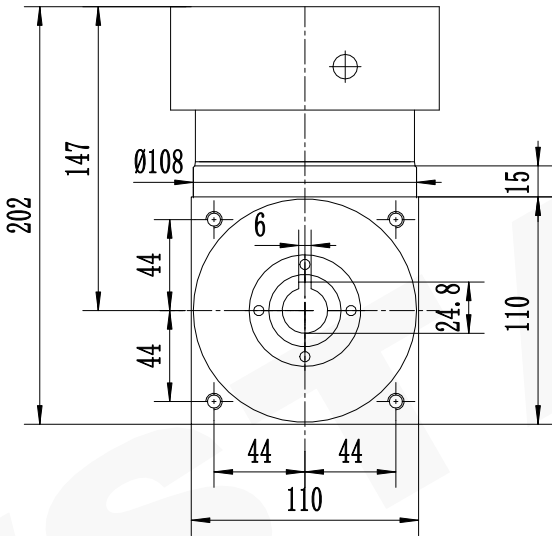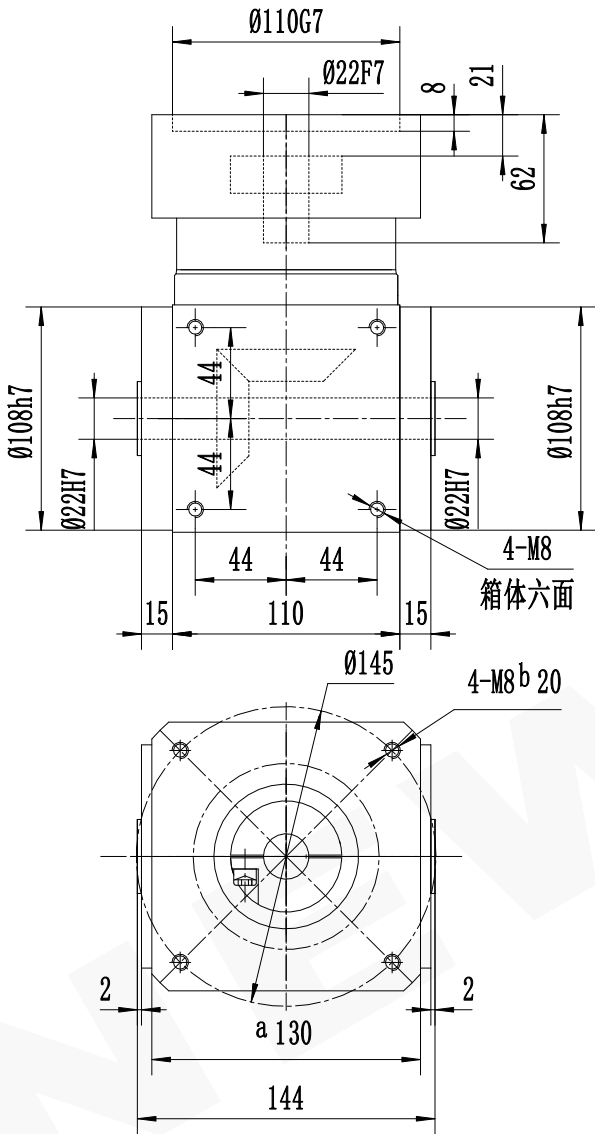

A

B

C

D

| | | | | | | | | | |
|-----------------------------------|-------------|--------------------------------|-----|----------------------------------|--|------------------------------|--|--|--|
| 减速比 (Ratio i) | | 1 | 2 | | | | | | |
| 额定承载扭矩 (Rated load torque) | Nm | 150 | 150 | | | | | | |
| 最大加速力矩 (Max. acceleration torque) | Nm | 225 | 225 | | | | | | |
| 急停扭矩 (Emergency stop torque) | Nm | 450 | 450 | | | | | | |
| 精密行星减速机技术参数 | | | | | | | | | |
| 容许最大径向载荷 (Max. radial load) | 2100N | 空载力矩20℃ (No-load torque) | | $\leq 0.36Nm$ | | | | | |
| 容许最大轴向载荷 (Max. axial load) | 1050N | 润滑 (Lubrication) | | 合成润滑油 (Synthetic grease) | | | | | |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | | $-15^{\circ}C \sim +90^{\circ}C$ | | | | | |
| 最大输入转速 (Max input speed) | 6000r/min | 使用寿命 (Service life) | | $\geq 20000h$ | | | | | |
| 噪音 (Noise) | $\leq 68db$ | 防护等级 (Protection grade) | | IP54 | | | | | |
| 回程间隙 (Backlash) | 6arcmin | | | PW系列 | | Tel/电话: 0533-6288333 6288444 | | | |
| | | | | P2 L1 | | Fax/传真: 0533-6288411 | | | |
| | | | | | | Web/网址: www.newstart.cn | | | |

未注线性尺寸极限偏差
Unmarked tolerance

| | |
|----------|-----------|
| 0.5-3 | ± 0.2 |
| 3-6 | ± 0.3 |
| 6-30 | ± 0.5 |
| 30-120 | ± 0.8 |
| 120-400 | ± 1.2 |
| 400-1000 | ± 2 |

精密行星减速机
Precision Planetary
Gear Boxes



PW110L1-i-K2-22-58-
110-145-M8

A. PW. 110.

1

2

3

4

5

6