

1

2

3

4

5




6

A

B

C

D

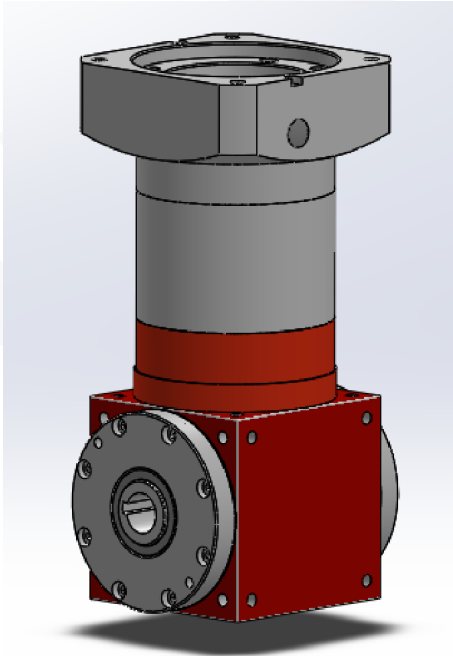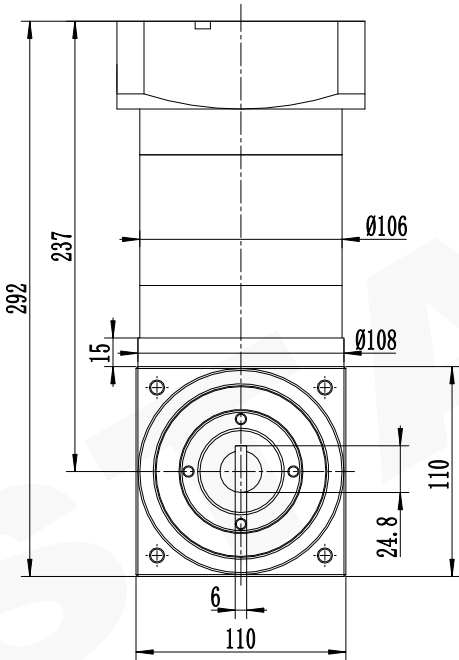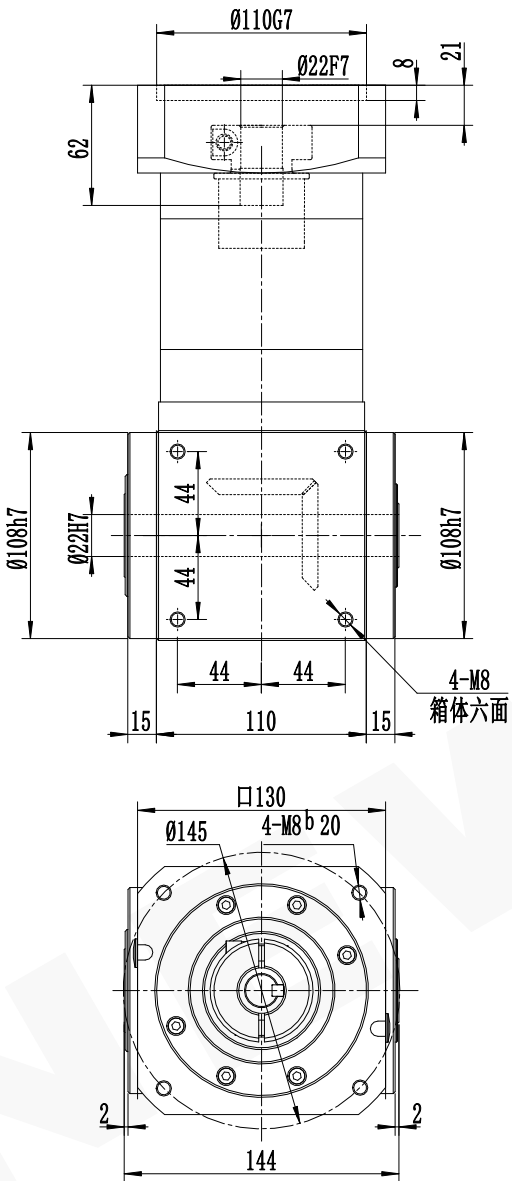


A

B

C

D

减速比 (Ratio i)		12	15	16	20	25	30	32	40	50	6-30	±0.5
额定承载扭矩 (Rated load torque)		Nm		150							30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm		225							120-400	±1.2
急停扭矩 (Emergency stop torque)		Nm		450							400-1000	±2
精密行星减速机技术参数											精密行星减速机	
容许最大径向载荷 (Max.radial load)		2100N	空载力矩20℃ (No-load torque)				≤ 0.36Nm				Precision Planetary	
容许最大轴向载荷 (Max.axial load)		1050N	润滑 (Lubrication)				合成润滑油 (Synthetic grease)				Gear Boxes	
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度 (Operation temperature)				-15℃~+90℃				 纽氏达特	
最大输入转速 (Max input speed)		6000r/min	使用寿命 (Service life)				≥20000h				PW110L2-i-K2-22-58-	
噪音 (Noise)		≤ 68db	防护等级 (Protection grade)				IP54				110-145-M8	
回程间隙 (Backlash)		10arcmin				PW系列		Tel/电话: 0533-6288333 6288444		A. PW. 110.		
		P2 L2				Fax/传真: 0533-6288411 Web/网址: www.newstart.cn						