

1

2

3

4

5





6

A

B

C

D

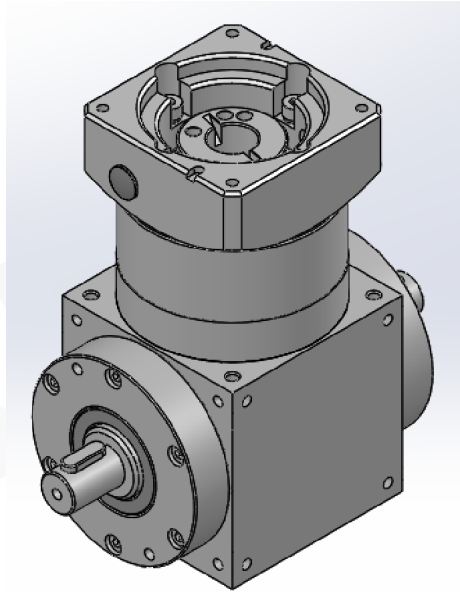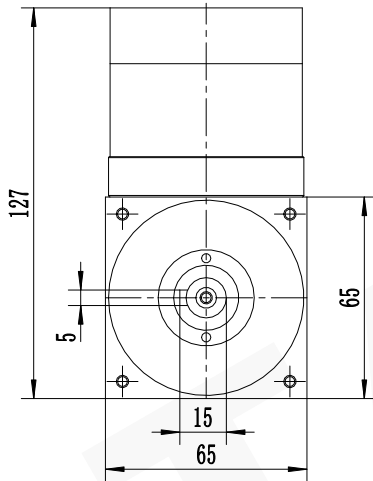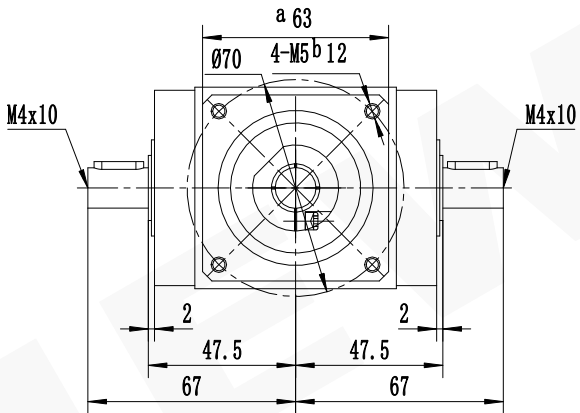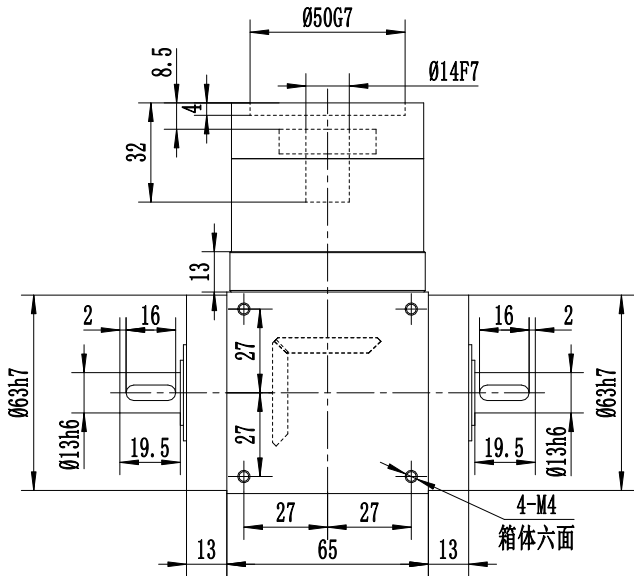

A

B

C

D

|                                   |    |    |    |  |  |  |  |  |  |
|-----------------------------------|----|----|----|--|--|--|--|--|--|
| 减速比 (Ratio i)                     |    | 1  | 2  |  |  |  |  |  |  |
| 额定承载扭矩 (Rated load torque)        | Nm | 25 | 24 |  |  |  |  |  |  |
| 最大加速力矩 (Max. acceleration torque) | Nm | 38 | 36 |  |  |  |  |  |  |
| 急停扭矩 (Emergency stop torque)      | Nm | 75 | 72 |  |  |  |  |  |  |

| 精密行星减速机技术参数                  |           |                                |                          |                              |
|------------------------------|-----------|--------------------------------|--------------------------|------------------------------|
| 容许最大径向载荷 (Max. radial load)  | 700N      | 空载力矩20℃ (No-load torque)       | ≤ 0.1Nm                  |                              |
| 容许最大轴向载荷 (Max. axial load)   | 350N      | 润滑 (Lubrication)               | 合成润滑油 (Synthetic grease) |                              |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | -15℃~+90℃                |                              |
| 最大输入转速 (Max input speed)     | 6000r/min | 使用寿命 (Service life)            | ≥20000h                  |                              |
| 噪音 (Noise)                   | ≤ 60db    | 防护等级 (Protection grade)        | IP54                     |                              |
| 回程间隙 (Backlash)              | 6arcmin   |                                | PW系列                     | Tel/电话: 0533-6288333 6288444 |
|                              |           |                                | P2 L1                    | Fax/传真: 0533-6288411         |
|                              |           |                                |                          | Web/网址: www.newstart.cn      |

未注线性尺寸极限偏差  
Unmarked tolerance

|          |      |
|----------|------|
| 0.5-3    | ±0.2 |
| 3-6      | ±0.3 |
| 6-30     | ±0.5 |
| 30-120   | ±0.8 |
| 120-400  | ±1.2 |
| 400-1000 | ±2   |