

1

2

3

4

5




6

A

B

C

D

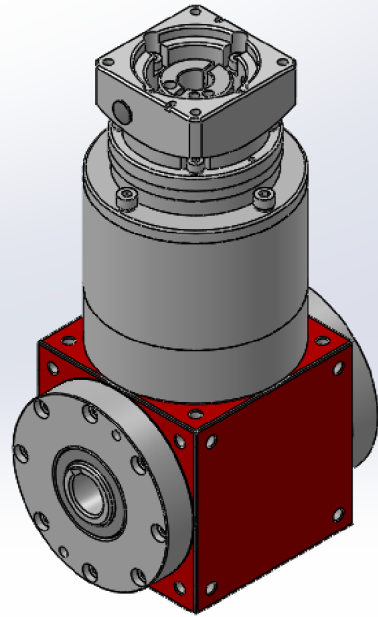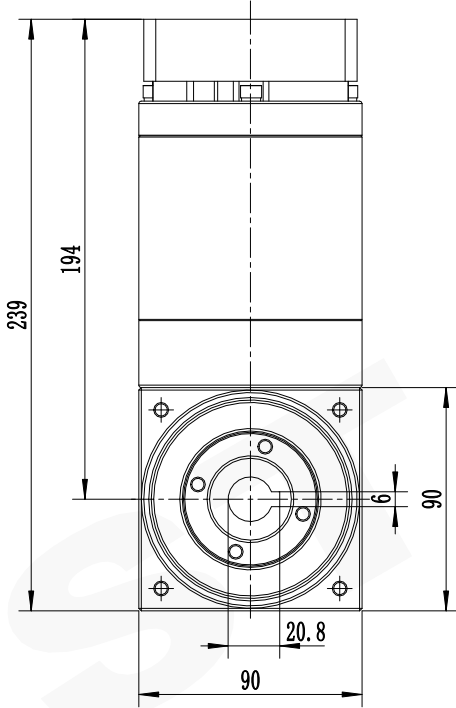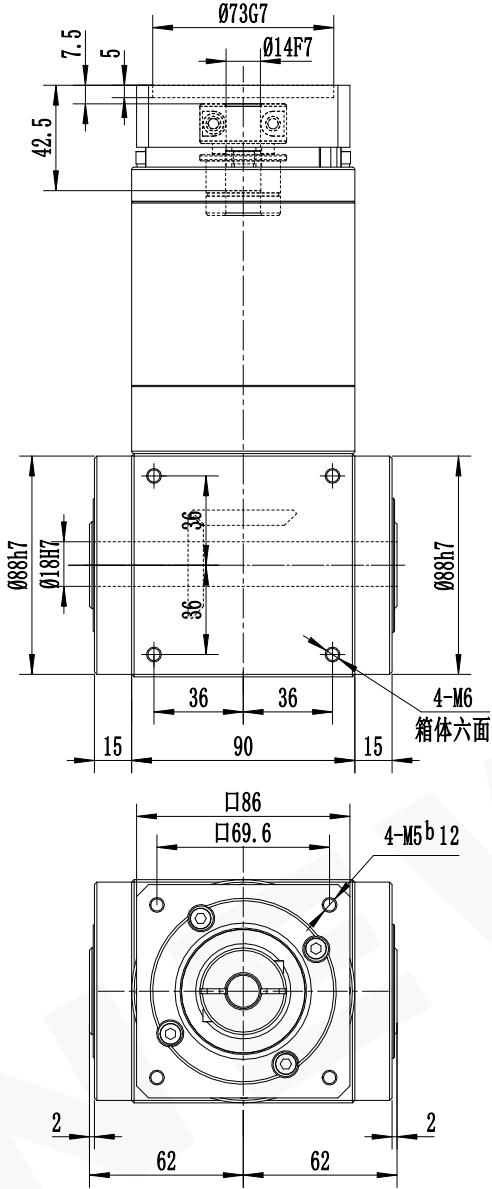


A

B

C

D

减速比 (Ratio i)		60	64	80	100	120	125	150	160	200	6-30	±0.5
额定承载扭矩 (Rated load torque)		Nm78									30-120	±0.8
最大加速力矩 (Max. acceleration torque)		Nm117									120-400	±1.2
急停扭矩 (Emergency stop torque)		Nm234									400-1000	±2
精密行星减速机技术参数											精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max. radial load)	1450N	空载力矩20℃ (No-load torque)				≤ 0.2Nm					 紐氏達特	
容许最大轴向载荷 (Max. axial load)	725N	润滑 (Lubrication)				合成润滑脂 (Synthetic grease)						
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)				-15℃~+90℃						
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)				≥20000h						
噪音 (Noise)	≤ 63db	防护等级 (Protection grade)				IP54					PW90L3-i-K2-14-37-73-□169.6-M5	
回程间隙 (Backlash)	12arcmin	PW系列 P2 L3				Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn					A. PW. 090.	

1

2

3

4

5

6