

1

2

3

4

5




6

A

B

C

D

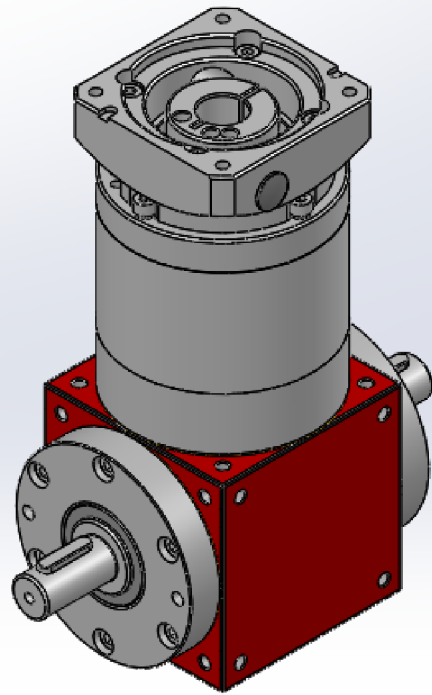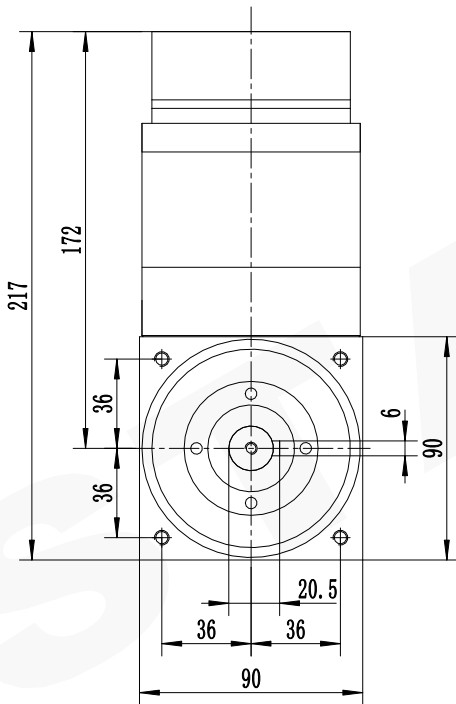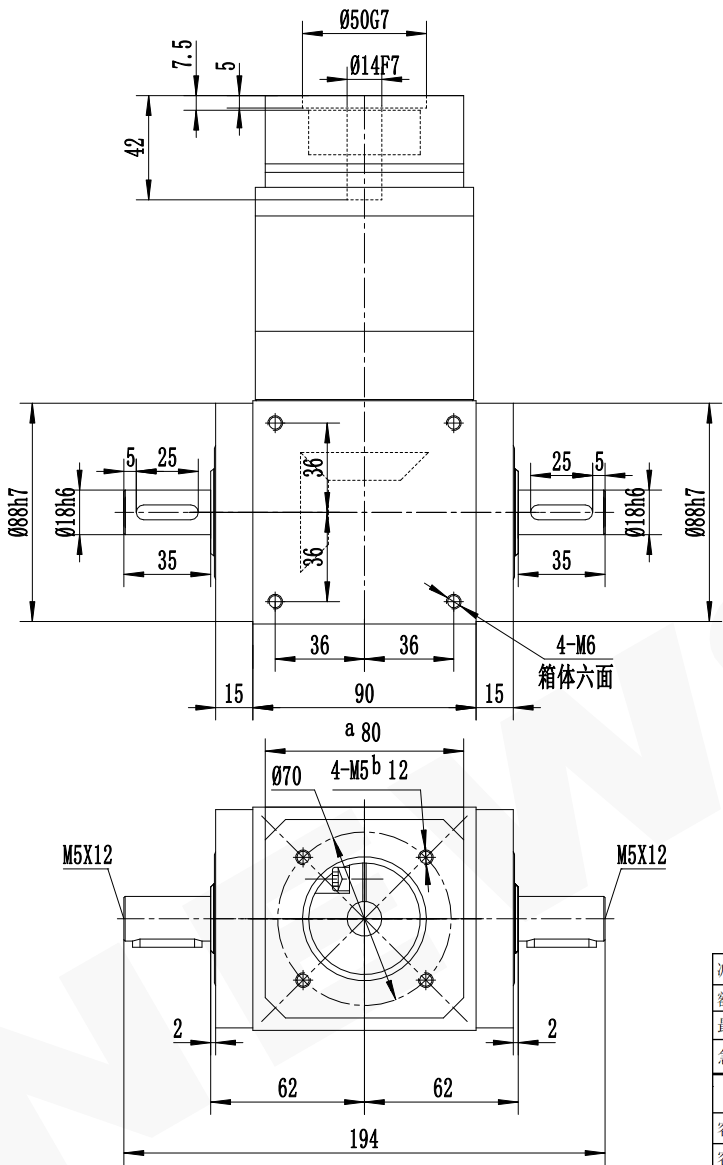


A

B

C

D

|                                  |  |    |    |     |    |    |    |    |    |    |           |                                |                              |   |
|----------------------------------|--|----|----|-----|----|----|----|----|----|----|-----------|--------------------------------|------------------------------|---|
| 减速比 (Ratio i)                    |  | 12 | 15 | 16  | 20 | 25 | 30 | 32 | 40 | 50 | 6-30      | ±0.5                           |                              |   |
| 额定承载扭矩 (Rated load torque)       |  | Nm |    | 78  |    |    |    |    |    |    | 30-120    | ±0.8                           |                              |   |
| 最大加速力矩 (Max.acceleration torque) |  | Nm |    | 117 |    |    |    |    |    |    | 120-400   | ±1.2                           |                              |   |
| 急停扭矩 (Emergency stop torque)     |  | Nm |    | 234 |    |    |    |    |    |    | 400-1000  | ±2                             |                              |   |
| 精密行星减速机技术参数                      |  |    |    |     |    |    |    |    |    |    | 精密行星减速机   |                                |                              |   |
| 容许最大径向载荷 (Max.radial load)       |  |    |    |     |    |    |    |    |    |    | 1450N     | 空载力矩20℃ (No-load torque)       | ≤ 0.2Nm                      | Precision Planetary Gear Boxes  |
| 容许最大轴向载荷 (Max.axial load)        |  |    |    |     |    |    |    |    |    |    | 725N      | 润滑 (Lubrication)               | 合成润滑脂 (Synthetic grease)     |  |
| 额定输入转速 (Nominal input speed)     |  |    |    |     |    |    |    |    |    |    | 3000r/min | 使用环境温度 (Operation temperature) | -15℃~+90℃                    | 纽氏达特  |
| 最大输入转速 (Max input speed)         |  |    |    |     |    |    |    |    |    |    | 6000r/min | 使用寿命 (Service life)            | ≥20000h                      | PW90L2-i-S2-14-30-50-70-M5  |
| 噪音 (Noise)                       |  |    |    |     |    |    |    |    |    |    | ≤ 63db    | 防护等级 (Protection grade)        | IP54                         |   |
| 回程间隙 (Backlash)                  |  |    |    |     |    |    |    |    |    |    | 10arcmin  | PW系列                           | Tel/电话: 0533-6288333 6288444 | A. PW. 090.   |
|                                  |  |    |    |     |    |    |    |    |    |    | P2 L2     | Fax/传真: 0533-6288411           |                              |   |
|                                  |  |    |    |     |    |    |    |    |    |    |           | Web/网址: www.newstart.cn        |                              |   |