

1

2

3

4

5





6

A

B

C

D

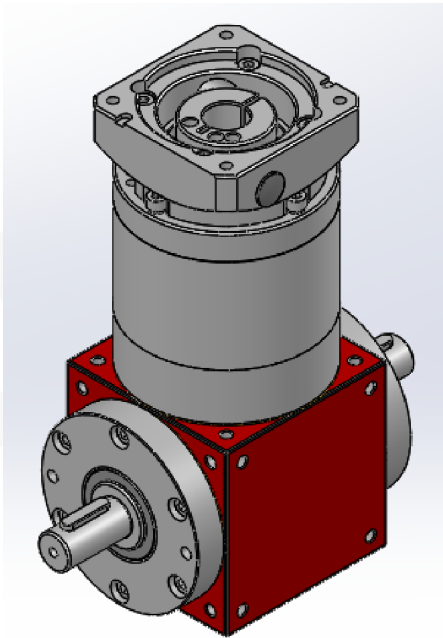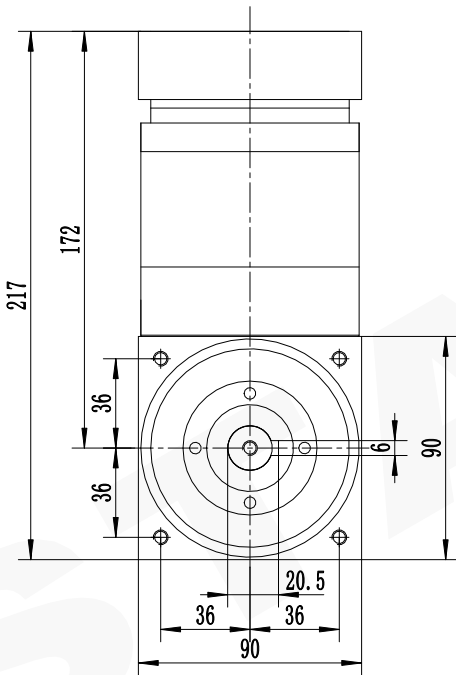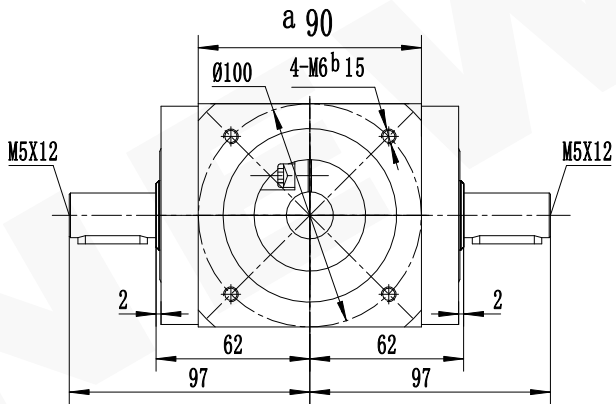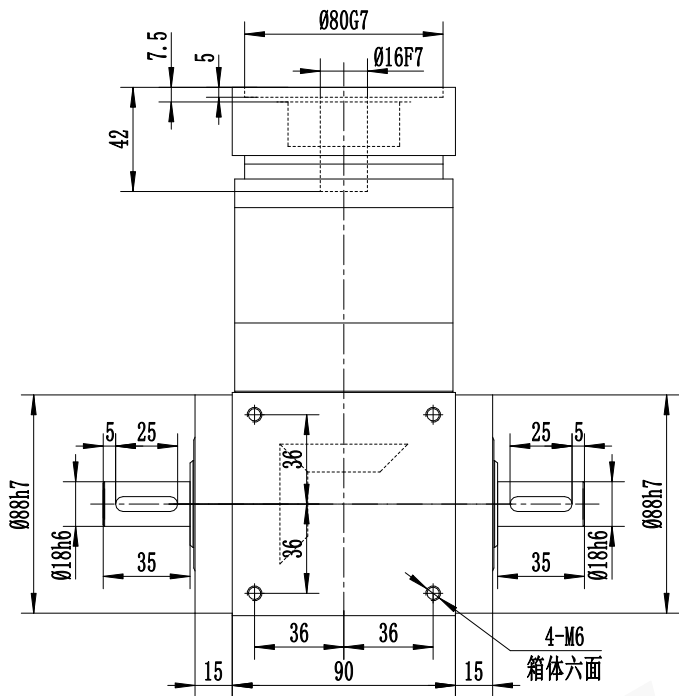


A

B

C

D

减速比 (Ratio i)		12	15	16	20	25	30	32	40	50	6-30	±0.5
额定承载扭矩(Rated load torque)		Nm		78							30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm		117							120-400	±1.2
急停扭矩 (Emergency stop torque)		Nm		234							400-1000	±2
精密行星减速机技术参数											精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max.radial load)		1450N	空载力矩20℃ (No-load torque)				≤ 0.2Nm				 纽氏达特	PW90L2-i-S2-16-40- 80-100-M6
容许最大轴向载荷 (Max.axial load)		725N	润滑 (Lubrication)				合成润滑油 (Synthetic grease)					
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度 (Operation temperature)				-15℃~+90℃					
最大输入转速 (Max input speed)		6000r/min	使用寿命 (Service life)				≥20000h				A. PW. 090.	
噪音 (Noise)		≤ 63db	防护等级 (Protection grade)				IP54					
回程间隙 (Backlash)		10arcmin				PW系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn				
						P2 L2						

1

2

3

4

5

6