

1

2

3

4

5




6

A

B

C

D

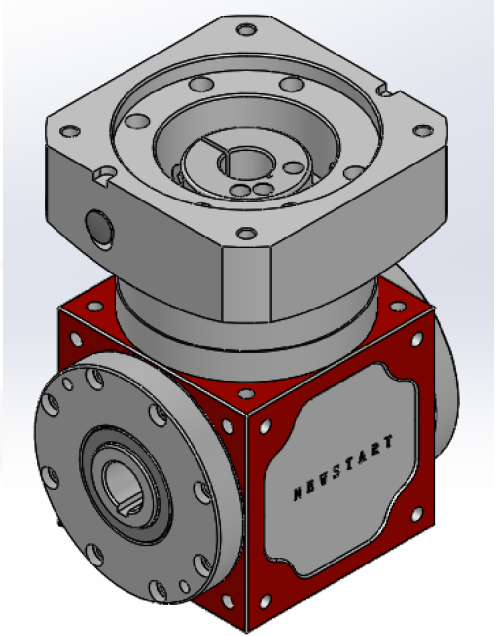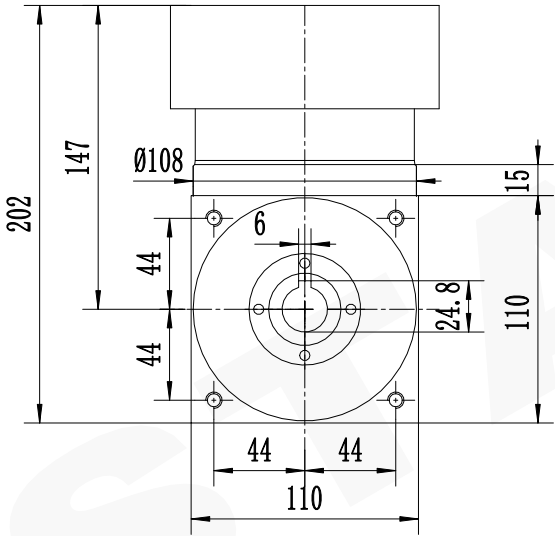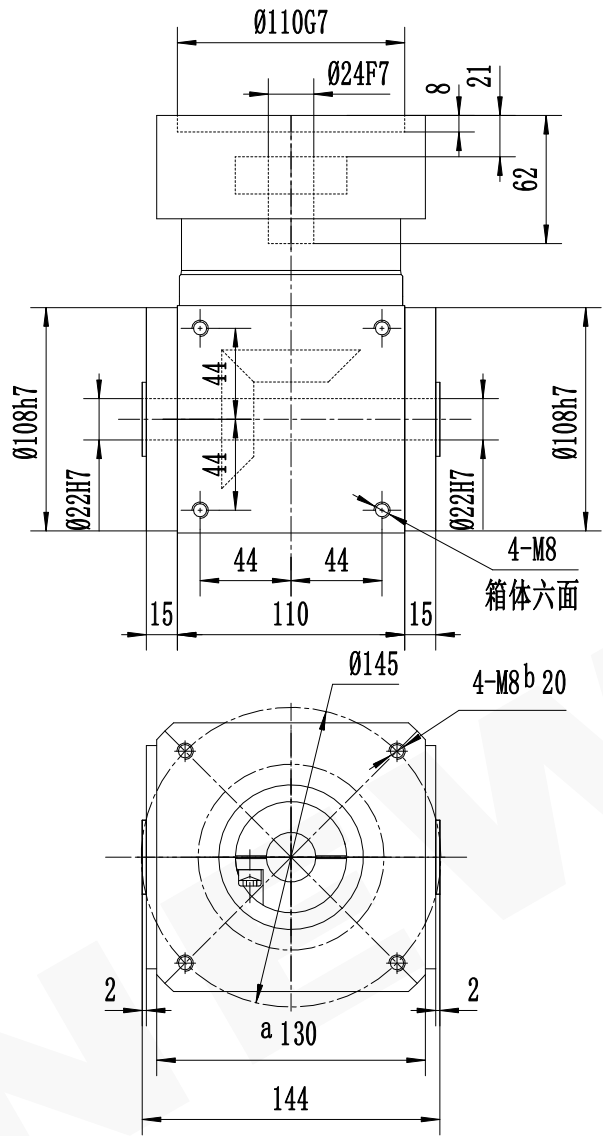

A

B

C

D

减速比 (Ratio i)		1	2							
额定承载扭矩 (Rated load torque)	Nm	150	150							
最大加速力矩 (Max. acceleration torque)	Nm	225	225							
急停扭矩 (Emergency stop torque)	Nm	450	450							

精密行星减速机技术参数					精密行星减速机				
容许最大径向载荷 (Max. radial load)	2100N	空载力矩20℃ (No-load torque)	$\leq 0.36Nm$			合成润滑脂 (Synthetic grease)			
容许最大轴向载荷 (Max. axial load)	1050N	润滑 (Lubrication)				-15℃~+90℃			
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)				$\geq 20000h$			
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)				IP54			
噪音 (Noise)	$\leq 68db$	防护等级 (Protection grade)				PW系列			
回程间隙 (Backlash)	6arcmin					Tel/电话: 0533-6288333 6288444			
						Fax/传真: 0533-6288411			
						Web/网址: www.newstart.cn			

未注线性尺寸极限偏差
Unmarked tolerance

0.5-3	± 0.2
3-6	± 0.3
6-30	± 0.5
30-120	± 0.8
120-400	± 1.2
400-1000	± 2

精密行星减速机
Precision Planetary
Gear Boxes



PW110L1-i-K2-24-58-
110-145-M8

A. PW. 110.

1

2

3

4

5

6