


1 2 3 4 5 6

A

B

C

D

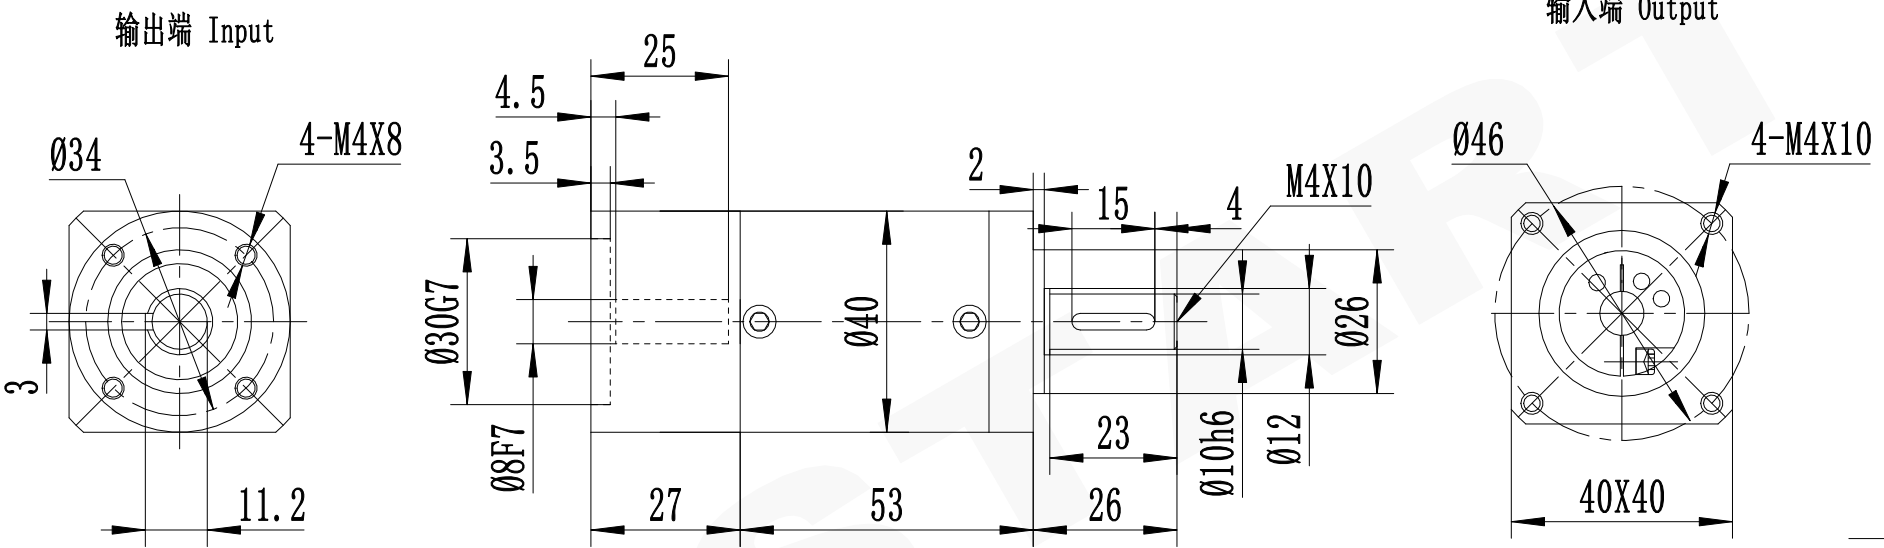


A

B

C

D

减速比 (Ratio i)		9	12/16/20/32	15/40/25/50/30	64/80			6-30	±0.5
额定承载扭矩(Rated load torque)		Nm	10	20	18	5		30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm	18	36	32.4	9		120-400	±1.2
急停扭矩 (Emergency stop torque)		Nm	30	60	54	15		400-1000	±2
精密行星减速机技术参数								精密行星减速机	
容许最大径向载荷 (Max.radial load)		220N	空载力矩20℃ (No-load torque)			≤ 0.05Nm			 PL040L2-i-P2-S2 8-25-30-46-M4
容许最大轴向载荷 (Max.axial load)		200N	润滑(Lubrication)			合成润滑脂 (Synthetic grease)			
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度(Operation temperature)			-15℃~+90℃			A. PL. 040.
最大输入转速 (Max input speed)		6000r/min	使用寿命(Service life)			≥20000h			
噪音 (Noise)		≤ 58db	防护等级(Protection grade)			IP54			
回程间隙 (Backlash)		18arcmin	PL系列			Tel/电话: 0533-6288333 6288444			
			P2 L2			Fax/传真: 0533-6288411			
						Web/网址: www.newstart.cn			

1 2 3 4 5 6