

A

B

C

D

1

2

3

4

5


6

A

B

C

D

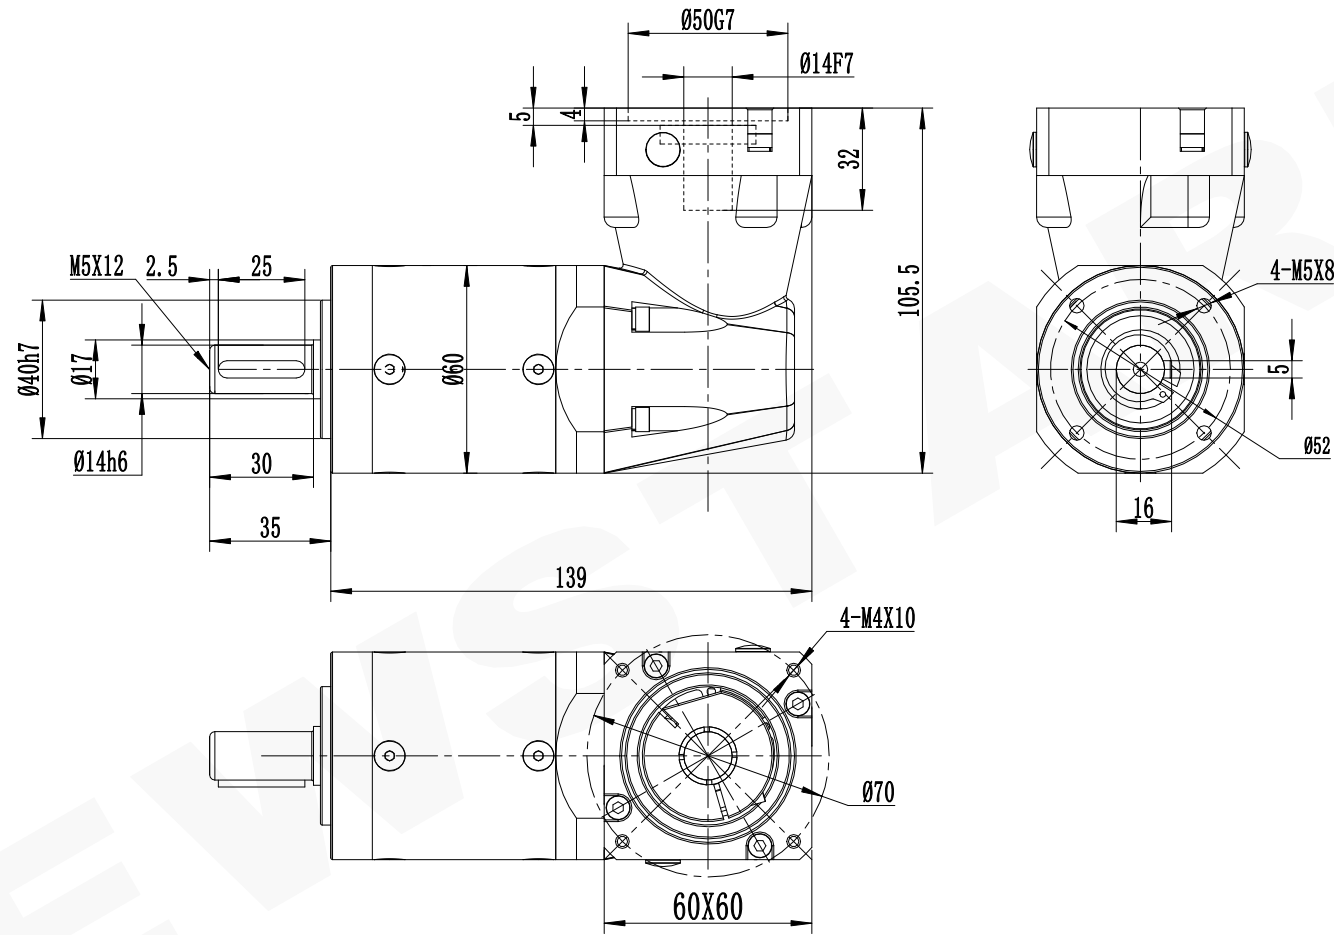

|                                   |    |      |             |                |       |  |  |  |
|-----------------------------------|----|------|-------------|----------------|-------|--|--|--|
| 减速比 (Ratio i)                     |    | 9    | 12/16/20/32 | 15/40/25/50/30 | 64/80 |  |  |  |
| 额定承载扭矩 (Rated load torque)        | Nm | 22   | 45          | 41             | 18    |  |  |  |
| 最大加速力矩 (Max. acceleration torque) | Nm | 39.6 | 81          | 73.8           | 32.4  |  |  |  |
| 急停扭矩 (Emergency stop torque)      | Nm | 66   | 135         | 123            | 54    |  |  |  |

精密行星减速机技术参数

|                              |           |                                |                               |
|------------------------------|-----------|--------------------------------|-------------------------------|
| 容许最大径向载荷 (Max. radial load)  | 480N      | 空载力矩20℃ (No-load torque)       | ≤ 0.1Nm                       |
| 容许最大轴向载荷 (Max. axial load)   | 600N      | 润滑 (Lubrication)               | 合成润滑油 (Synthetic grease)      |
| 额定输入转速 (Nominal input speed) | 3000r/min | 使用环境温度 (Operation temperature) | -15℃~+90℃                     |
| 最大输入转速 (Max input speed)     | 6000r/min | 使用寿命 (Service life)            | ≥20000h                       |
| 噪音 (Noise)                   | ≤ 63db    | 防护等级 (Protection grade)        | IP54                          |
| 回程间隙 (Backlash)              | 16arcmin  | WPL系列                          | Tel/ 电话: 0533-6288333 6288444 |
|                              |           | P2 L2                          | Fax/ 传真: 0533-6288411         |
|                              |           |                                | Web/ 网址: www.newstart.cn      |

未注线性尺寸极限偏差  
Unmarked tolerance

|          |      |
|----------|------|
| 0.5-3    | ±0.2 |
| 3-6      | ±0.3 |
| 6-30     | ±0.5 |
| 30-120   | ±0.8 |
| 120-400  | ±1.2 |
| 400-1000 | ±2   |

精密行星减速机  
Precision Planetary  
Gear Boxes



WPL060L2-i-P2-S2  
14-30-50-70-M4

A. WPL. 060.