

1

2

3

4

5




6

A

B

C

D

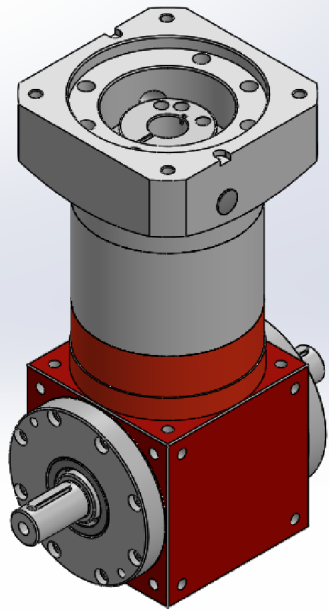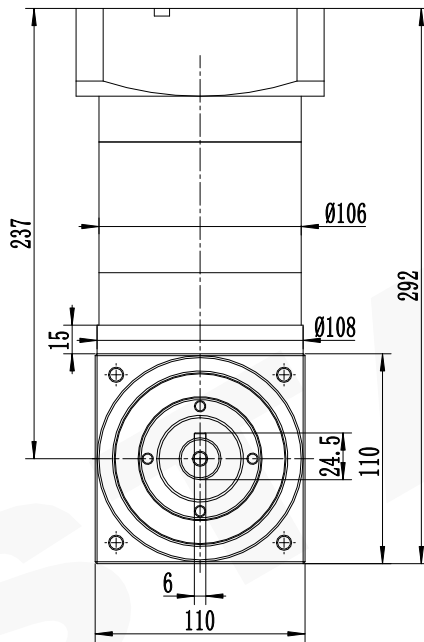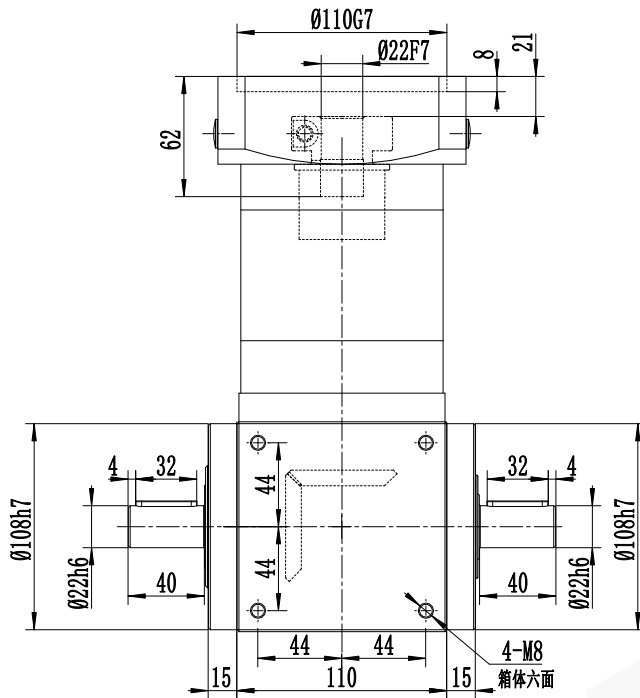



A

B

C

D

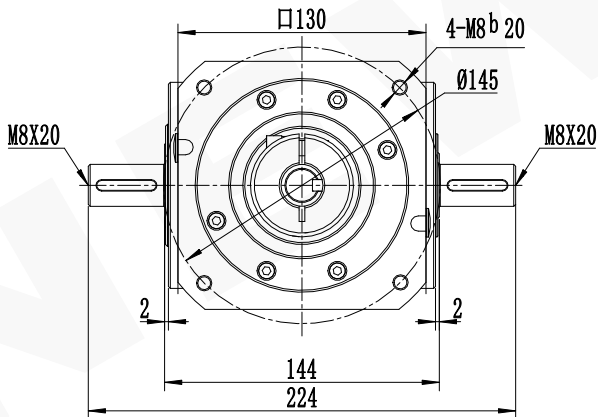

减速比 (Ratio i)		12	15	16	20	25	30	32	40	50	6-30	±0.5
额定承载扭矩(Rated load torque)		Nm		150							30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm		225							120-400	±1.2
急停扭矩 (Emergency stop torque)		Nm		450							400-1000	±2
精密行星减速机技术参数											精密行星减速机	
容许最大径向载荷 (Max.radial load)		2100N		空载力矩20℃(No-load torque)				≤ 0.36Nm			Precision Planetary Gear Boxes	
容许最大轴向载荷 (Max.axial load)		1050N		润滑(Lubrication)				合成润滑油 (Synthetic grease)				
额定输入转速 (Nominal input speed)		3000r/min		使用环境温度 (Operation temperature)				-15℃ +90℃			紐氏達特	
最大输入转速 (Max input speed)		6000r/min		使用寿命 (Service life)				≥20000h			PW110L2-i-S2-22-58-110-145-M8	
噪音 (Noise)		≤ 68db		防护等级 (Protection grade)				IP54				
回程间隙 (Backlash)		10arcmin				PW系列		Tel/电话: 0533-6288333 6288444			A. PW. 110.	
						P2 L2		Fax/传真: 0533-6288411				
								Web/网址: www.newstart.cn				